
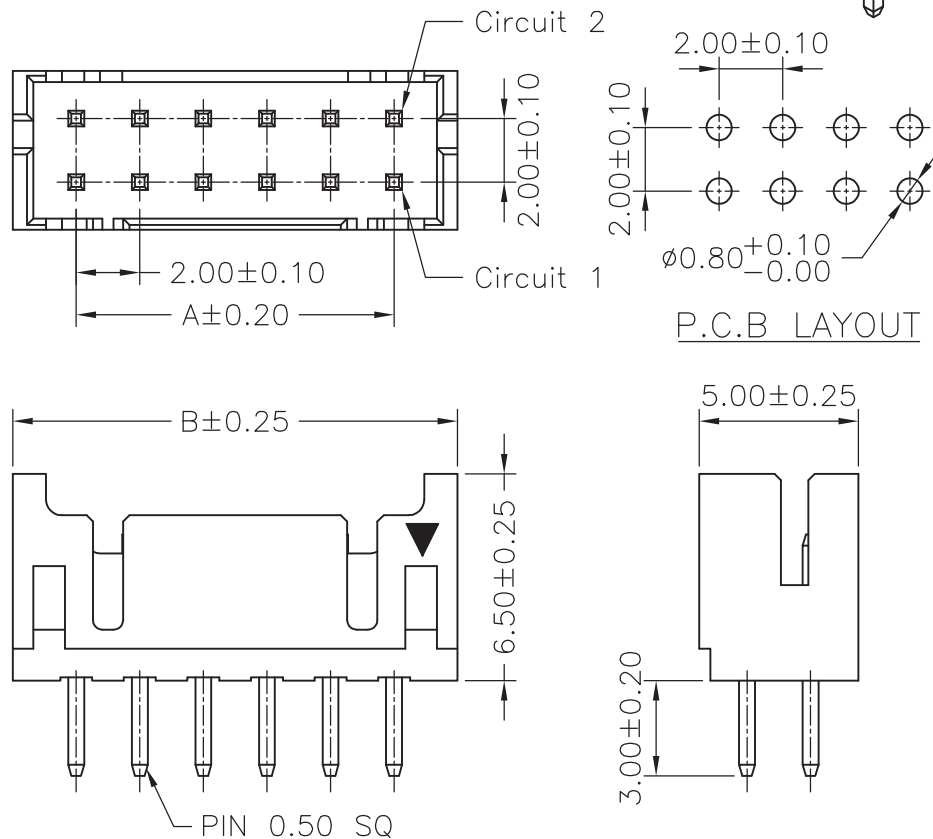


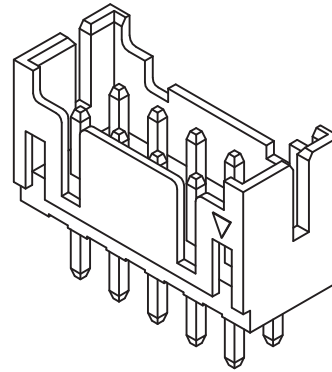

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Color: Black

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
'';	2.00	6.00
'';	4.00	8.00
'';	6.00	10.00
'';	8.00	12.00
'';	10.00	14.00
'';	12.00	16.00
'';	14.00	18.00
'';	16.00	20.00
'';	18.00	22.00
'';	20.00	24.00
'';	22.00	26.00
'';	24.00	28.00
'';	26.00	30.00
'';	28.00	32.00
'';	30.00	34.00
'';	32.00	36.00
'';	34.00	38.00
'';	36.00	40.00
'';	38.00	42.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF11-D-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X20:40WAY

DIP 180°

DESCRIPTION: 2.00mm PITCH 180° WAFER