

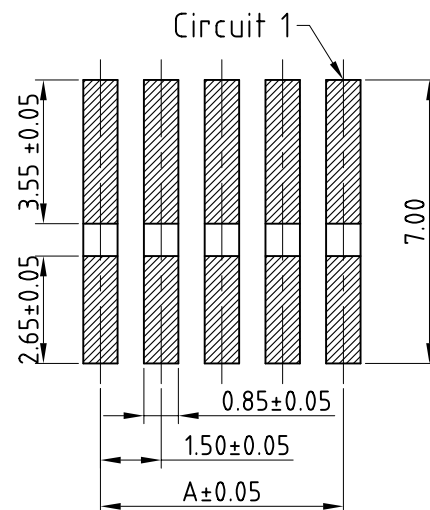
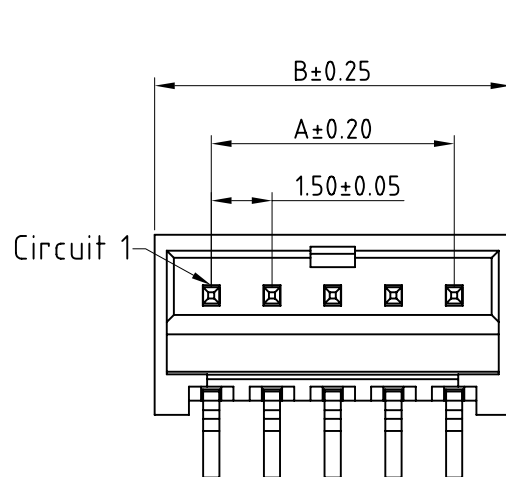



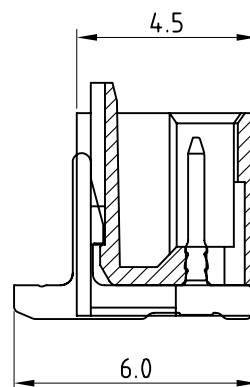

P.C.B LAYOUT

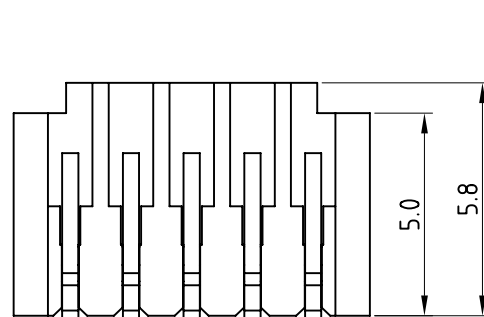

Specification

Pitch Between Poles : 1.50mm
 Current Rating : 3.0A AC/DC
 Voltage Rating : 250V AC/DC
 Contact Resistance : 20mΩ MAX.
 Insulation Resistance : 1,000MΩ MIN.
 Withstand Voltage : 500V AC/Minute
 Temperature Range : -25°C To +85°C

Features

Available Number Of Circuits : 02 To 15
 Material : Nylon 9T UL 94V-0
 Contact : 0.4mm(.016") Flat Pin ,Brass,
 Semi-Gloss Tin

Dimensional And Order Information

Circuits	Part No.	DIM:(mm)	
		A	B
02	ZHQ-V-02	1.50	4.30
03	ZHQ-V-03	3.00	5.80
04	ZHQ-V-04	4.50	7.30
05	ZHQ-V-05	6.00	8.80
06	ZHQ-V-06	7.50	10.30
07	ZHQ-V-07	9.00	11.80
08	ZHQ-V-08	10.50	13.30
09	ZHQ-V-09	12.00	14.80
10	ZHQ-V-10	13.50	16.30
11	ZHQ-V-11	15.00	17.80
12	ZHQ-V-12	16.50	19.30
13	ZHQ-V-13	18.00	20.80
14	ZHQ-V-14	19.50	22.30
15	ZHQ-V-15	21.00	23.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

ZHQ-V-xx-LF
 SERIES | LEADFREE
 02~15WAY
 180°SMT

DESCRIPTION: 1.50mm PITCH WIRE TO BOARD CONNECTOR 180°