
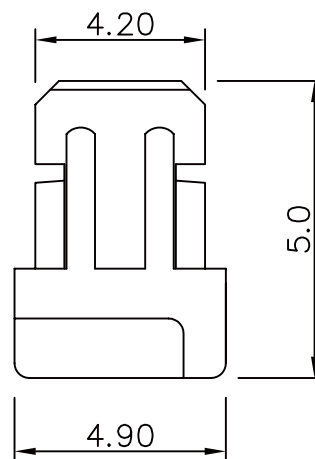
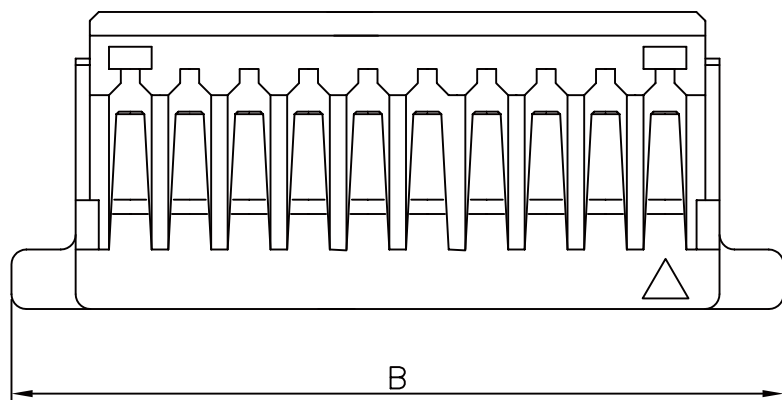


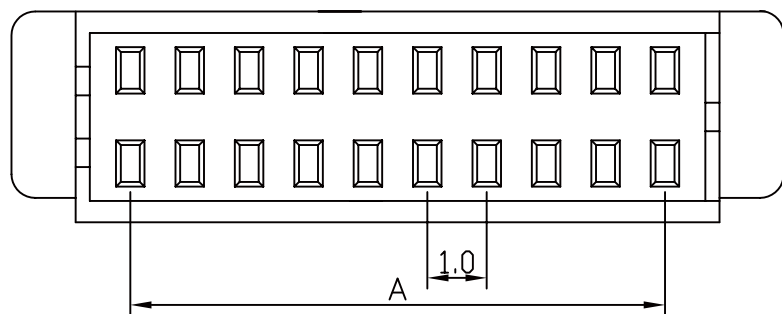

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 50V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 500MΩ/ min.

Dielectric Withstanding Voltage: 500V AC/ min.

Contact Resistance: 20MΩ/ max.

Material

Material: PBT, UL94V-0

Poles	Dimension mm		Part No.	Note.
	A	B		
20	9.00	13.00	SHD-H-20	
30	14.00	18.00	SHD-H-30	
40	19.00	23.00	SHD-H-40	
50	24.00	28.00	SHD-H-50	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

SHD-H-xx-LF
SERIES | LEADFREE
20~50WAY
HOUSING

DESCRIPTION: 1.00mm Wire-to-Board Housing