


Features:

- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon

Specification:

- Current rating: 3A
- Voltage rating: 250V
- Insulation resistance: 500M Ω Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

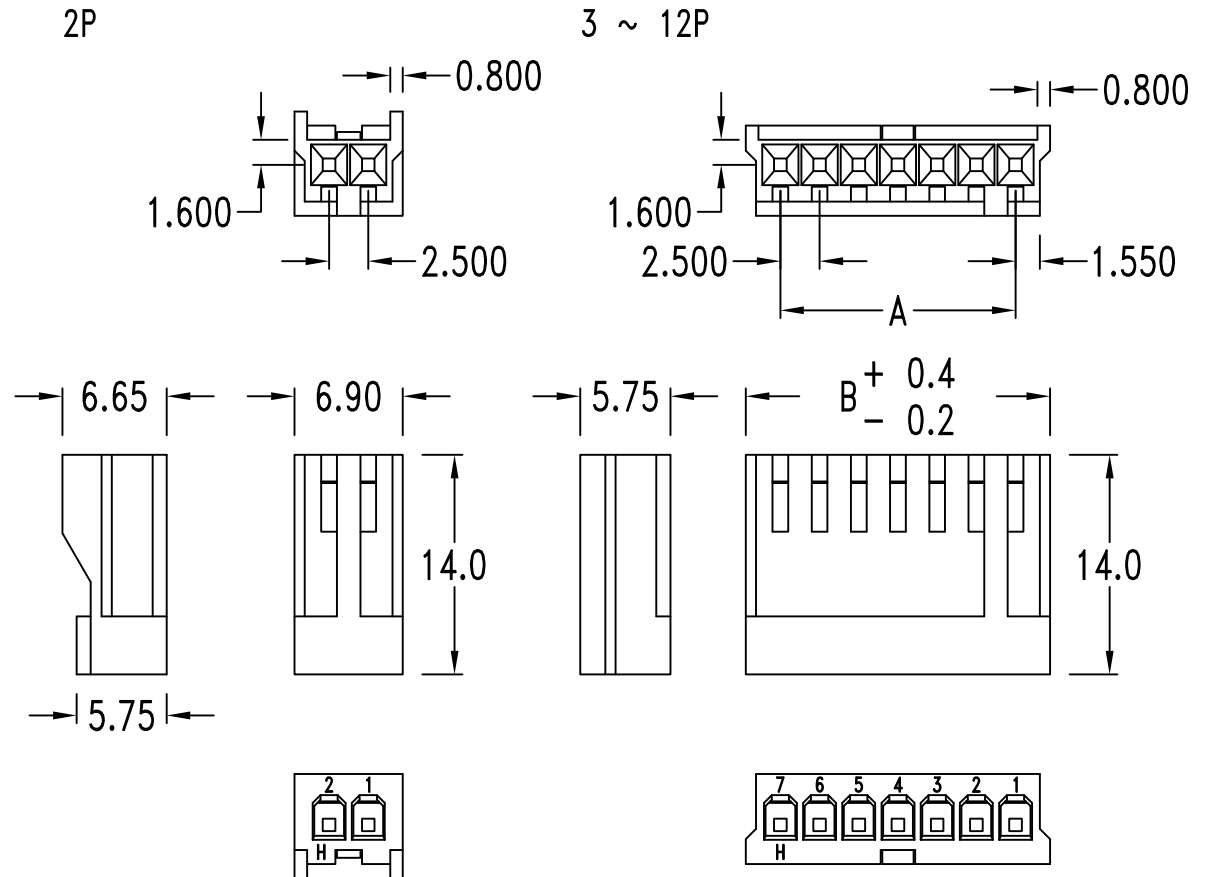

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5±0.08	6.9	5	10.0±0.10	14.4	8	17.5±0.15	21.9	11	25.0±0.15	29.4
3	5.0±0.10	9.4	6	12.5±0.10	16.9	9	20.0±0.15	24.4	12	27.5±0.20	31.9
4	7.5±0.10	11.9	7	15.0±0.15	19.4	10	22.5±0.15	26.9			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±



ORDER INFORMATION

EI-H-xx-LF
SERIES | LEADFREE
02-12 WAY
HOUSING

DESCRIPTION: