


Features:

- * With Polarizing Key & Optional Side Latches
- * Material : PPO UL 94V-1 (Black)

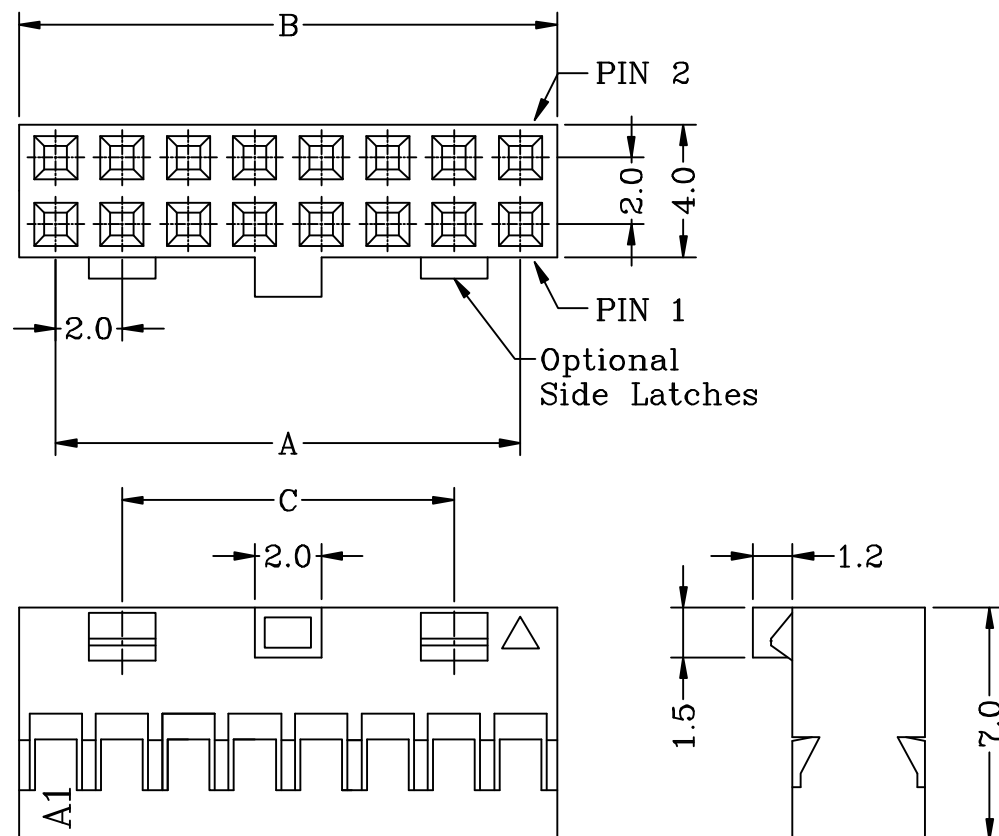

Dimensional Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
4	2.0	4.2	—	1000
6	4.0	6.2	—	1000
8	6.0	8.2	—	1000
10	8.0	10.2	—	1000
12	10.0	12.2	—	1000
14	12.0	14.2	8.0	1000
16	14.0	16.2	10.0	1000
18	16.0	18.2	12.0	1000
20	18.0	20.2	14.0	1000
22	20.0	22.2	16.0	1000
24	22.0	24.2	18.0	1000
26	24.0	26.2	20.0	1000
28	26.0	28.2	22.0	1000
30	28.0	30.2	24.0	1000
32	30.0	32.2	26.0	1000
34	32.0	34.2	28.0	500
36	34.0	36.2	30.0	500
38	36.0	38.2	32.0	500
40	38.0	40.2	34.0	500
42	40.0	42.2	36.0	500
44	42.0	44.2	38.0	500
46	44.0	46.2	40.0	500
48	46.0	48.2	42.0	500
50	48.0	50.2	44.0	500
60	58.0	60.2	54.0	500

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±



ORDER INFORMATION

MPVK-HD-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY
2X30:60WAY

D TYPE
HOUSING

DESCRIPTION: 2.00mm pitch dual row crimp terminal socket