
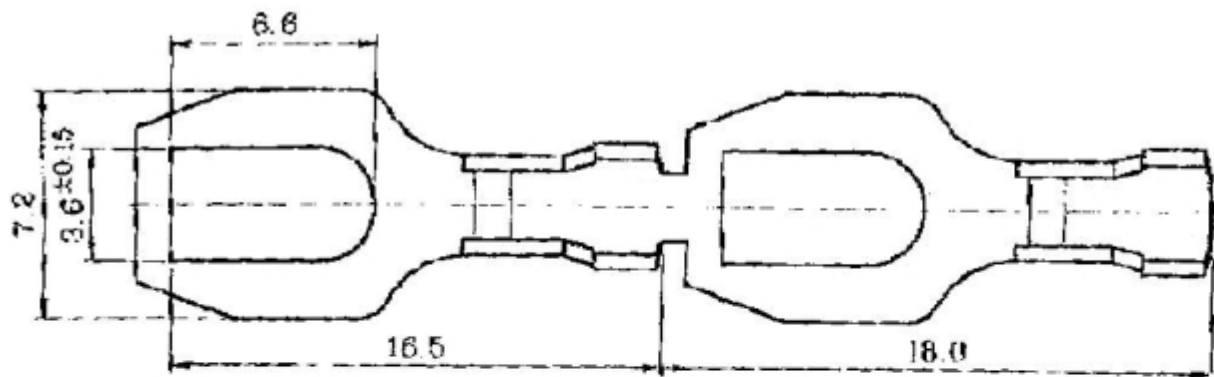



NOTE:

- 1.表面處理:鍍錫 60u以上
- 2.SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 60u"

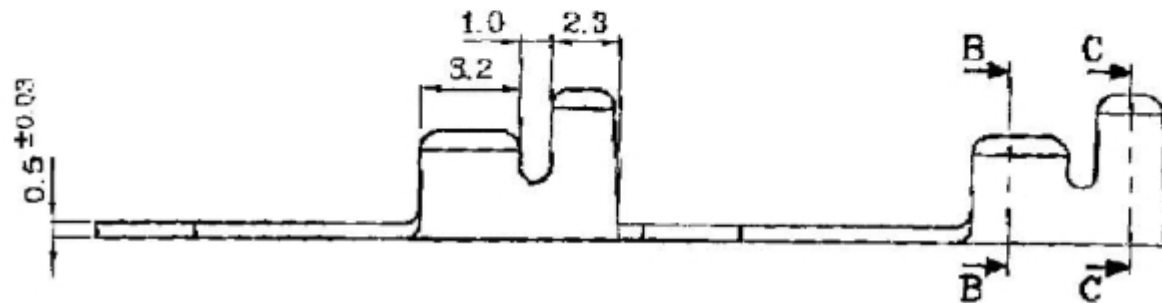

8000	20~16	3.4	3.2	4.6	4.0
QTY"	WIRE AWG#	W1	W2	H1	H2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

YT-36-16-LF
SERIES | LEADFREE
16~20AWG
ID:3.6mm

DESCRIPTION: