
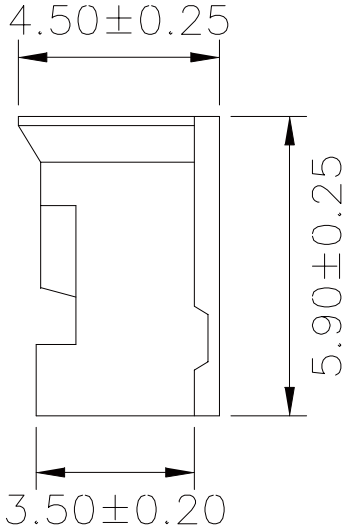
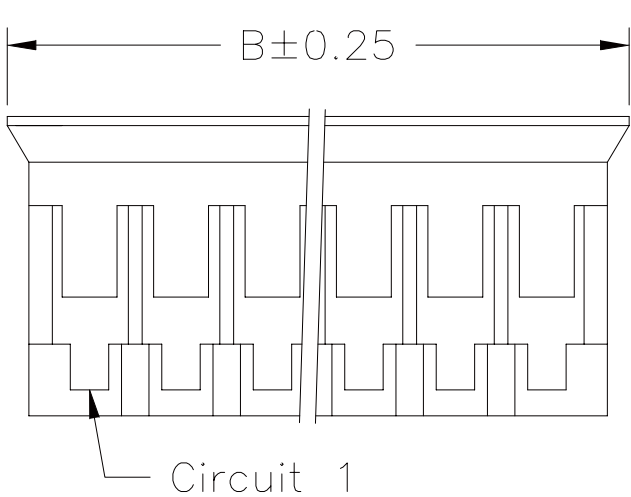
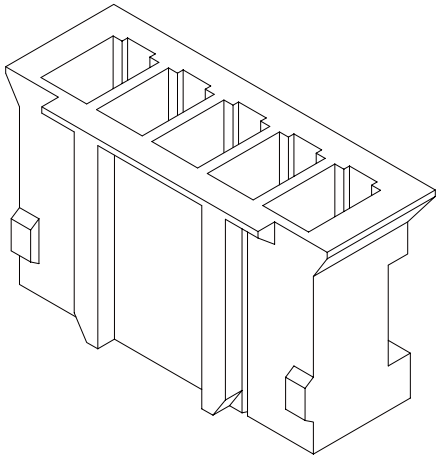


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ILS-H-02	2.00	5.60
ILS-H-03	4.00	7.60
ILS-H-04	6.00	9.60
ILS-H-05	8.00	11.60
ILS-H-06	10.00	13.60
ILS-H-07	12.00	15.60
ILS-H-08	14.00	17.60
ILS-H-09	16.00	19.60
ILS-H-10	18.00	21.60
ILS-H-11	20.00	23.60
ILS-H-12	22.00	25.60
ILS-H-13	24.00	27.60
ILS-H-14	26.00	29.60
ILS-H-15	28.00	31.60

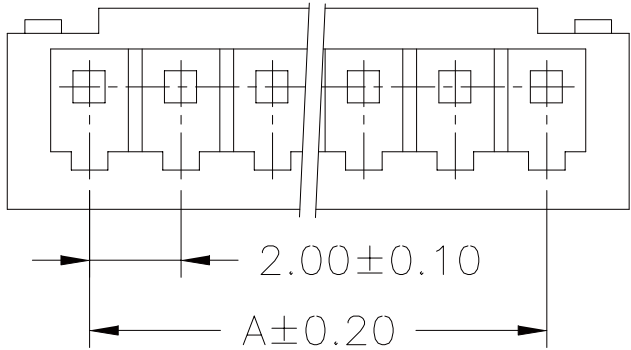

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

ILS-H-xx-LF
SERIES | LEADFREE
02~15WAY
HOUSING

DESCRIPTION: 2.00mm PITCH HOUSING