


NOTE:

1. WIRE RANGE: AWG 12-10/4-6mm²
2. INSULATED COLOR: YELLOW
3. MAXIMUM ELECTRICAL RATING: 75 °C 600 VOLTS 48 AMPERE MAX.

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	d1 ±0.20	D ±0.30
AWG 12-10 4-6 mm ²	YT-V37S-10	3.7	7.2	7.5	25.2	12.5	3.4	6.5
	YT-V37L-10	3.7	8.5	7.5	25.2			
	YT-V43S-10	4.3	8.5	7.5	25.2			
	YT-V43L-10	4.3	9.5	7.5	25.2			
	YT-V53-10	5.3	9.5	7.5	25.2			
	YT-V65S-10	6.5	9.5	7.5	25.2			
	YT-V65L-10	6.5	12.0	12.0	31.2			
	YT-V84-10	8.4	13.5	10.5	30.0			

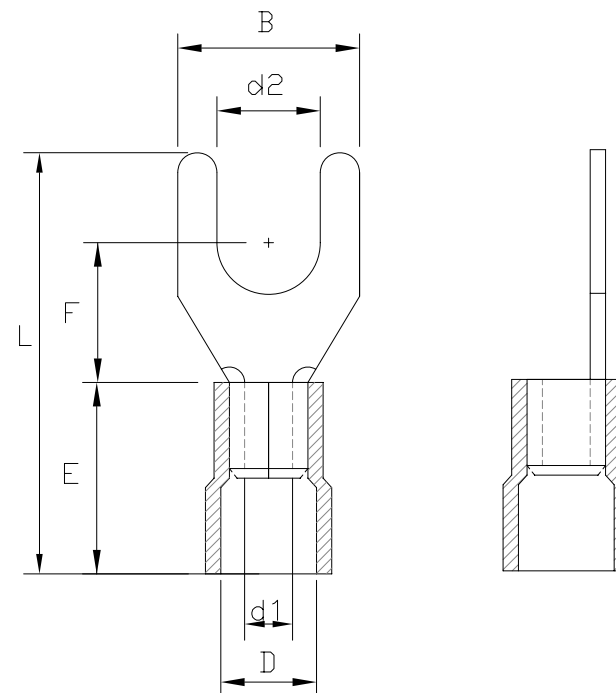

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

YT-Vxxy-10-LF

SERIES
LEADFREE
10~12AWG
BLANK: STANDARD
S.L/ B WIDTH
PVC
37: d2 3.7mm
43: d2 4.3mm

DESCRIPTION: