




SPECIFICATIONS



Circuit:2~10
Voltage rating:125V AC,DC
Withstanding voltage:500V AC/minute
Insulation resistance:1000M Ω HM min
Temperature range:-25°C~+85°C
Material:UL94V-0 nylon 66





PR-S-02





PR-S-03





PR-S-04





PR-S-05





PR-S-06





PR-S-07




PR-S-08

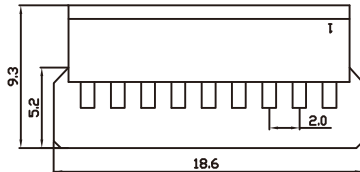

PR-S-09

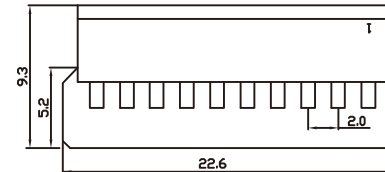

PR-S-10




MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4

TOLERANCES ARE
X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$



ORDER INFORMATION

PR-S-xx-LF
SERIES | LEADFREE
02~10WAY
FEMALE HOUSING

DESCRIPTION: