


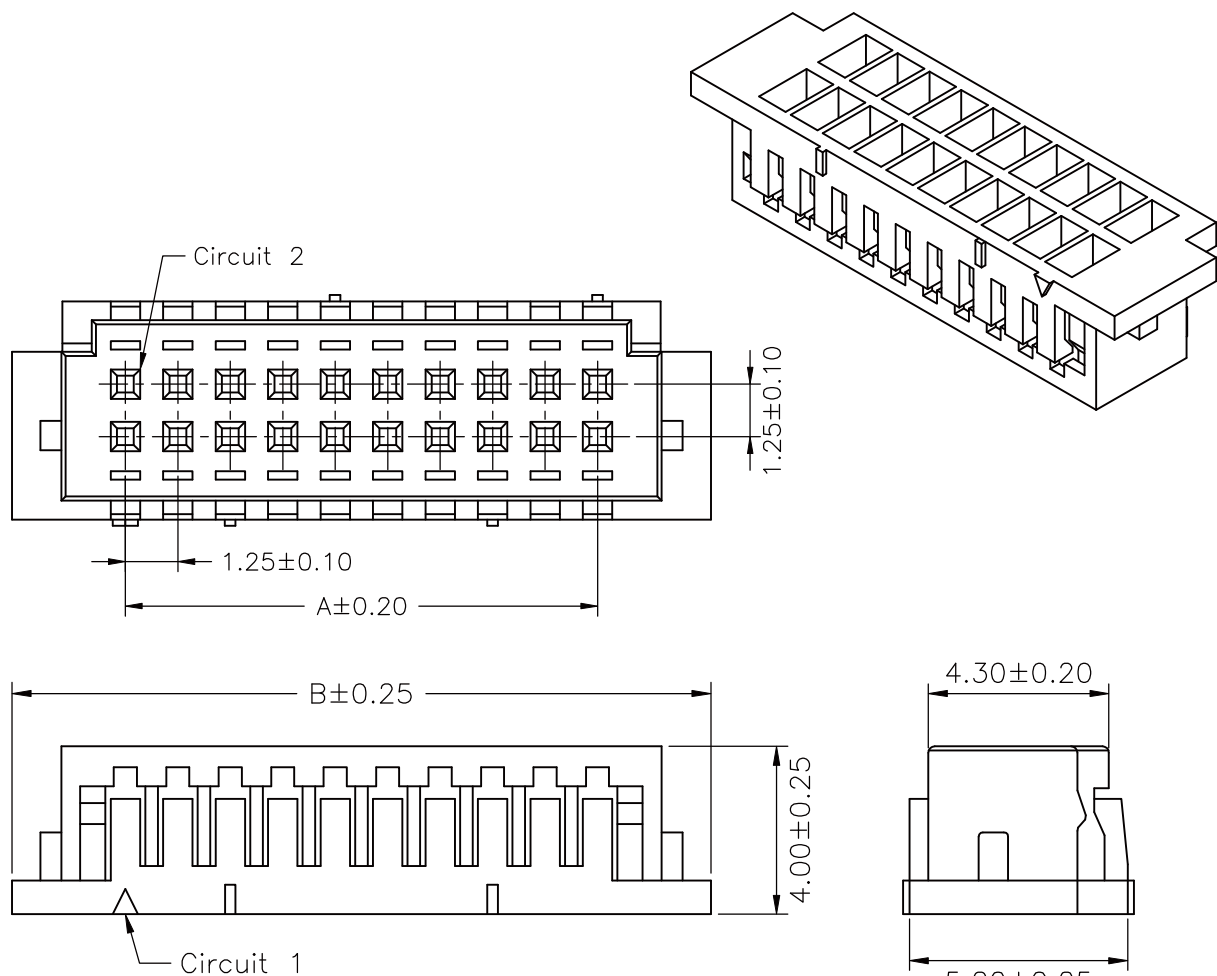

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF13-H-2X05	5.00	10.40
DF13-H-2X10	11.25	16.65
DF13-H-2X15	17.50	22.90
DF13-H-2X20	23.75	29.15

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF13-H-2Xxx-LF

SERIES

LEADFREE

2X05:10 WAY

2X20:40 WAY

HOUSING

DESCRIPTION: 1.25mm PITCH DUAL ROW HOUSING