

FEATURES:




- . 2-20 Circuits
- . Housing, UL 94V-2 Nylon 6/6, Natural
- . Designed for parallel and perpendicular board stacking, connection
- . Mates with .045"[1.14mm] square pins

SPECIFICATIONS:

- . Current rating: 7A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- . Contact resistance: Initial Value/10m Ω max.
After environmental testing
/20m Ω max.
- . Insulation resistance: 5000 M Ω min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

PIN數	DIM.A	DIM.B	Tolerances
02	7.82	3.96	± 0.25
03	11.78	7.92	
04	15.74	11.88	
05	19.70	15.84	
06	23.66	19.80	
07	27.62	23.76	± 0.30
08	31.58	27.72	
09	35.54	31.68	
10	39.50	35.64	
11	43.46	39.60	
12	47.42	43.56	
13	51.38	47.52	

PIN數	DIM.A	DIM.B	Tolerances
14	55.34	51.48	± 0.36
15	59.30	55.44	
16	63.26	59.40	
17	67.22	63.36	
18	71.18	67.32	
19	75.14	71.28	± 0.42
20	79.10	75.24	

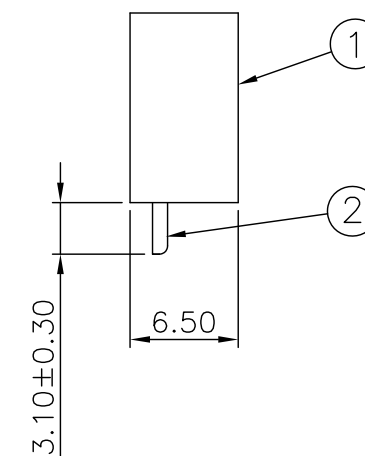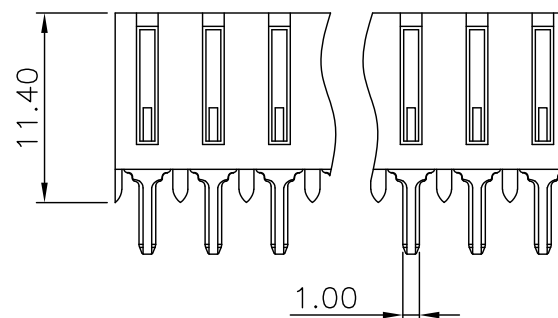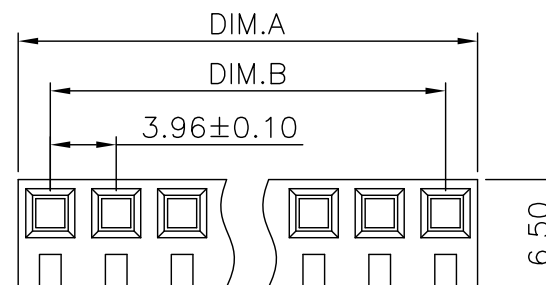

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG $\pm 1^{\circ}$



ORDER INFORMATION

KX-TX-xx-LF
SERIES | 02~25WAY | LEADFREE
NON LOCK
TOP ENTRY

DESCRIPTION: