
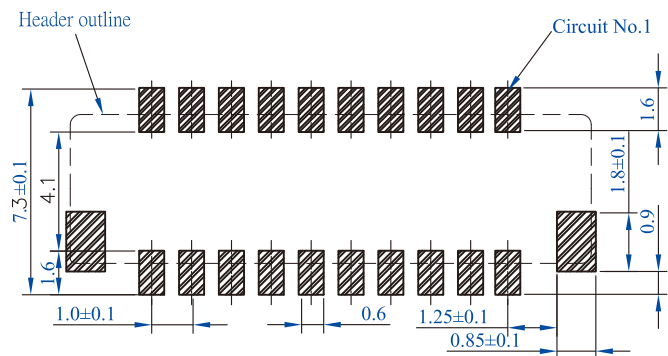

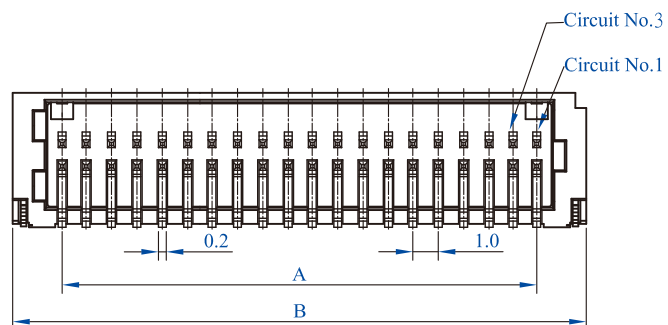


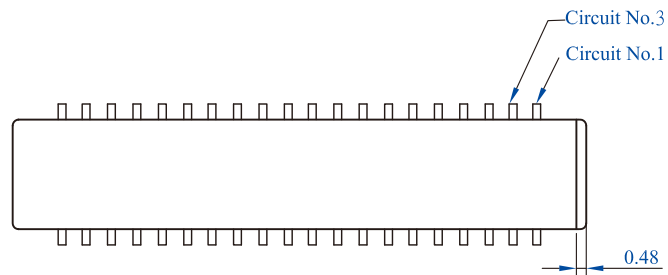

RECOMMENDED P.C. BOARD PATTERN DIM.

Specifications

Electrical

Voltage Rating: 50VAC DC

Current Rating: 1.0A AC DC (AWG 28)

Contact Resistance: Initial value/20mΩmax

After environmental testing/40mΩmax

Insulation Resistance: 100MΩmin

Temperature Range: -25°C~+85°C

Withstanding voltage:500V AC/minute

Material and Finish

Insulator: Nylon 6T, UL94V-0

Color: Natural

Contact: Phosphor Bronze, Tin-Plated

Circuits	Dimension mm (in.)	
	A	B
20	9.0	13.1
30	14.0	18.1
40	19.0	23.1
50	24.0	28.1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±



ORDER INFORMATION

SHD-WXT-xx-LF
SERIES | | | LEADFREE
| | | 20~50WAY
| | | TIN /PLATED
| | | NON POST
| | | 90°SMT

DESCRIPTION: SHD1.0mm Wire to Board Wafer SMT 90°(雙排)