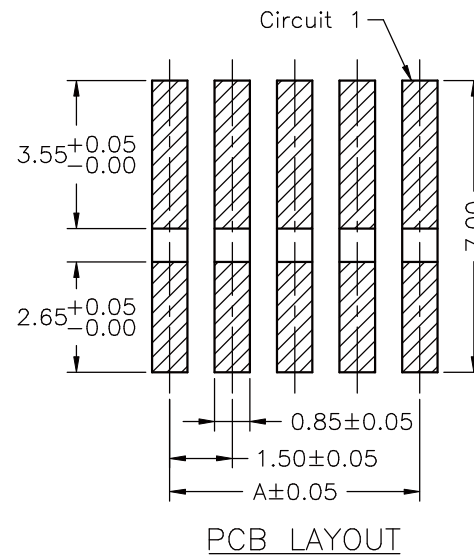
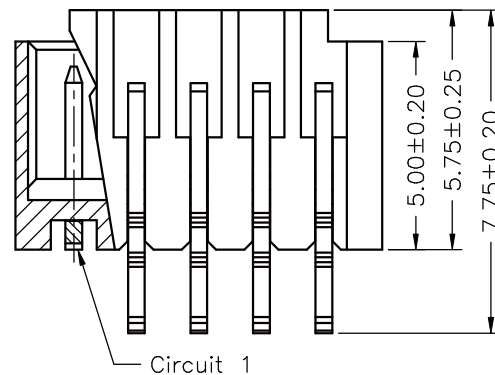
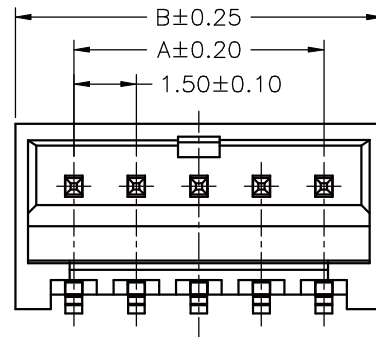
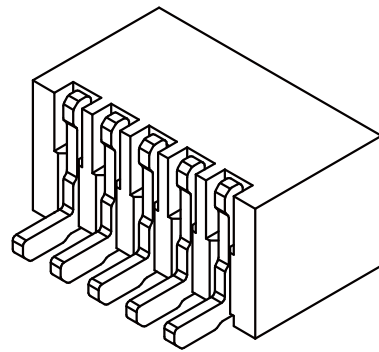


SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 6T,UL94V-0

Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ZHQ-W-02	1.50	4.30
ZHQ-W-03	3.00	5.80
ZHQ-W-04	4.50	7.30
ZHQ-W-05	6.00	8.80
ZHQ-W-06	7.50	10.30
ZHQ-W-07	9.00	11.80
ZHQ-W-08	10.50	13.30
ZHQ-W-09	12.00	14.80
ZHQ-W-10	13.50	16.30
ZHQ-W-11	15.00	17.80
ZHQ-W-12	16.50	19.30
ZHQ-W-13	18.00	20.80
ZHQ-W-14	19.50	22.30
ZHQ-W-15	21.00	23.80

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

ZHQ-W-xx-LF

SERIES | LEADFREE
02~15WAY
90° SMT

DESCRIPTION: 1.50mm PITCH 90°WAFER-SMT TYPE