

Features:


- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66

Specification:

- Current rating: 1A (0.8A for #32 AWG)
- Voltage rating: 125V
- Contact resistance on crimped portion: $5\text{m}\Omega$ Max.
- Withstanding voltage: 250V AC/minute
- Temperature rise: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

(including temperature rise)

Dimensional Information (mm)

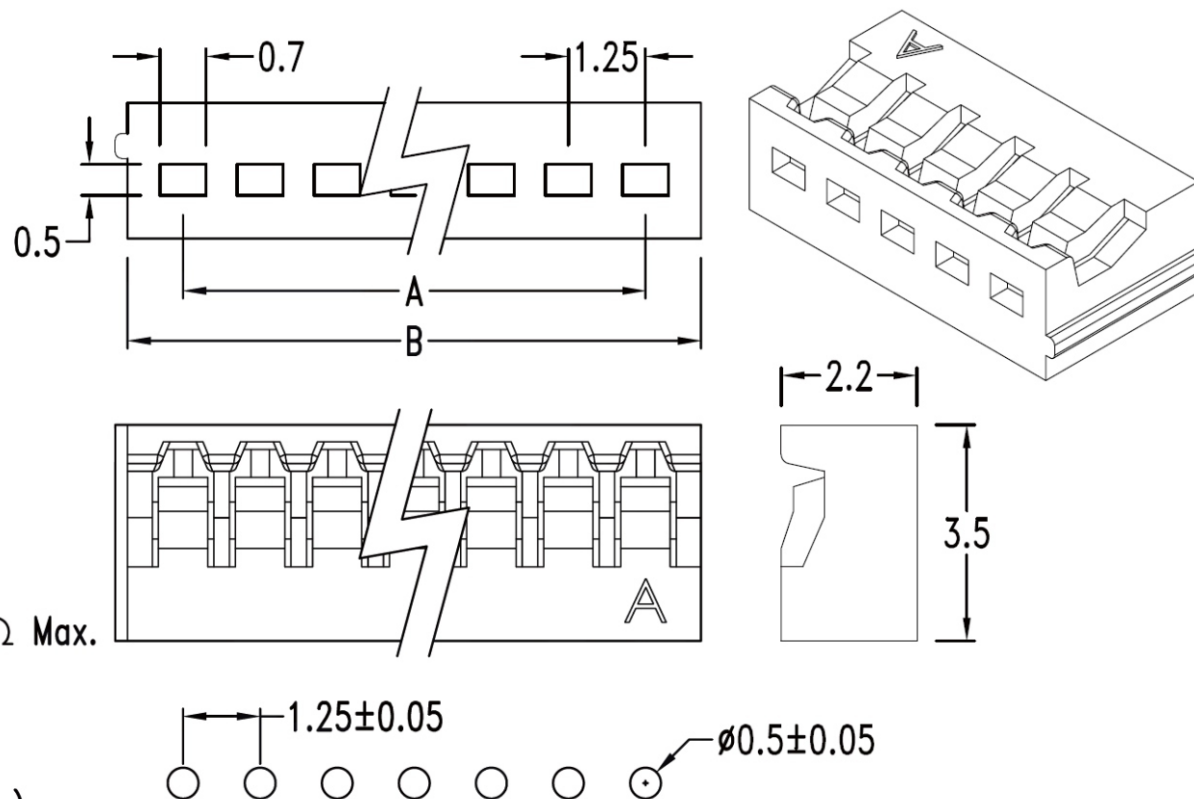

P. C. board hole Dimensions

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	1.25	3.05	6	6.25	8.05	10	11.25	13.05	14	16.25	18.05
3	2.50	4.30	7	7.50	9.30	11	12.50	14.30	15	17.50	19.30
4	3.75	5.55	8	8.75	10.55	12	13.75	15.55			
5	5.00	6.80	9	10.00	11.80	13	15.00	16.80			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ± 0.30
X, ± 0.25
.XX, ± 0.15
.XXX, ± 0.05
ANG $\pm$



ORDER INFORMATION

FN-H-xx-LF
SERIES | LEADFREE
02~15WAY
HOUSING

DESCRIPTION: