
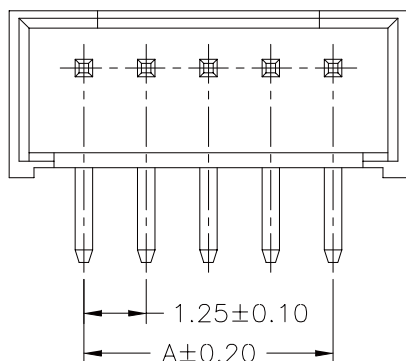
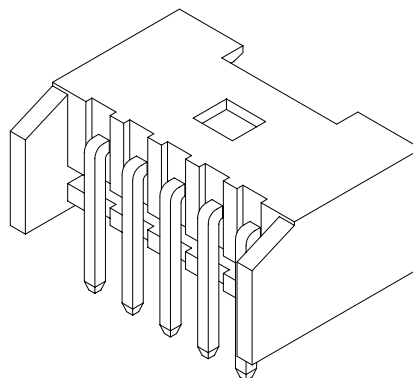
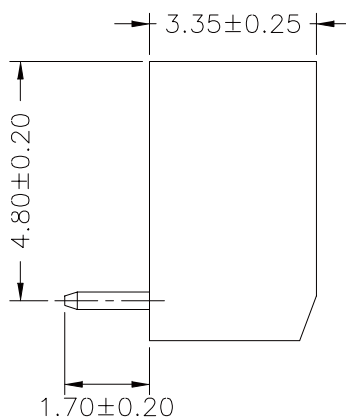


P.C.B. LAYOUT

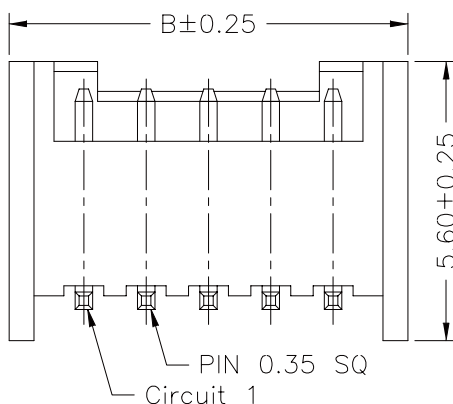

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ILZ-R-02	1.25	4.25
ILZ-R-03	2.50	5.50
ILZ-R-04	3.75	6.75
ILZ-R-05	5.00	8.00
ILZ-R-06	6.25	9.25
ILZ-R-07	7.50	10.50
ILZ-R-08	8.75	11.75
ILZ-R-09	10.00	13.00
ILZ-R-10	11.25	14.25
ILZ-R-11	12.50	15.50
ILZ-R-12	13.75	16.75
ILZ-R-13	15.00	18.00
ILZ-R-14	16.25	19.25
ILZ-R-15	17.50	20.50

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE


X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±



ORDER INFORMATION

ILZ-R-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 90°

DESCRIPTION: 1.25mm PITCH 90° WAFER