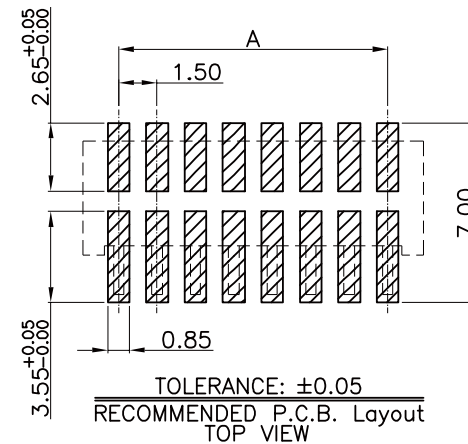
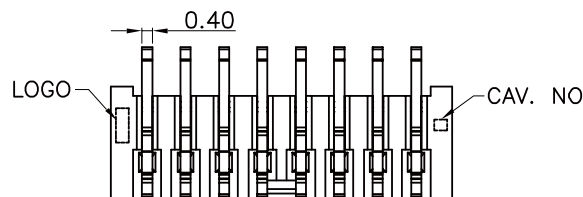

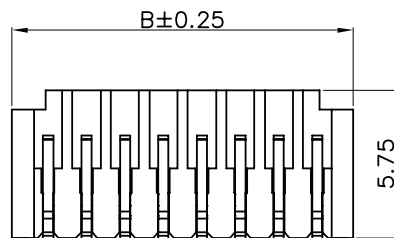

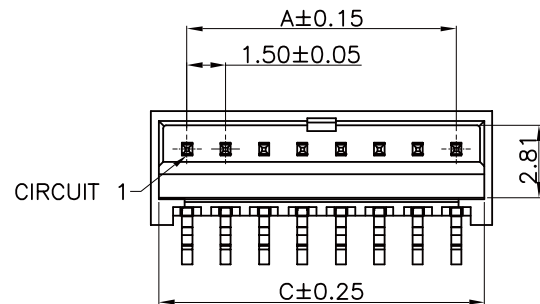


Mating Condition (REF.)

NOTES:

- MATERIAL:
INSULATION(STANDARD): NYLON 9T, UL 94V-0 (CREAM)
INSULATION(HALOGEN FREE): NYLON 9T, UL 94V-0 (BLACK)
CONTACT: COPPER ALLOY
- CONTACT FINISH: (VOID)--60u" MATTE TIN PLATED OVER NICKEL
GO--GOLD FLASH OVER NICKEL
- PACKING: 800 PCS/TAPE REEL

PIN	DIM. (mm)			PIN	DIM. (mm)		
	A	B	C		A	B	C
02	-	4.30	3.70	09	12.00	14.80	14.20
03	3.00	5.80	5.20	10	13.50	16.30	15.70
04	4.50	7.30	6.70	11	15.00	17.80	17.20
05	6.00	8.80	8.20	12	16.50	19.30	18.70
06	7.50	10.30	9.70	13	18.00	20.80	20.20
07	9.00	11.80	11.20	14	19.50	22.30	21.70
08	10.50	13.30	12.70	15	21.00	23.80	23.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ± 3°

PPOJECTION



ORDER INFORMATION

ZHQ-VC-xx-LF
SERIES T LEADFREE
02~15WAY
CAP
180°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 1.50mm, VERTICAL, SMT TYPE, ASSEMBLY