
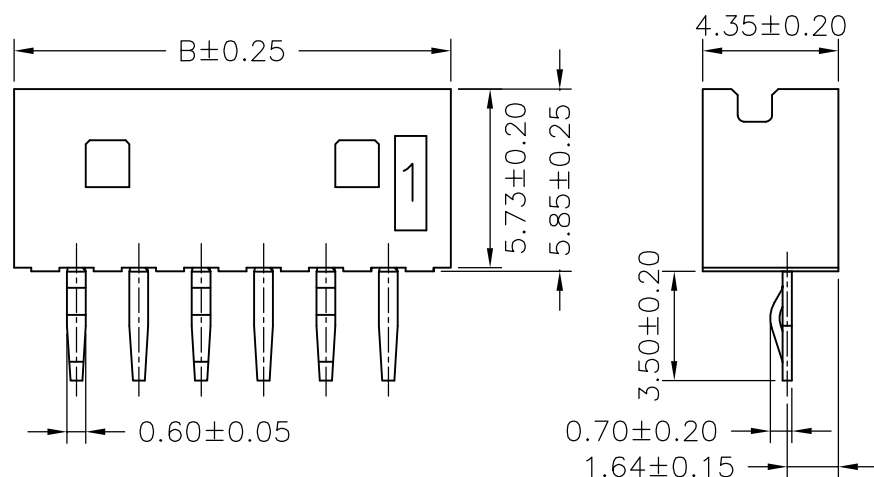
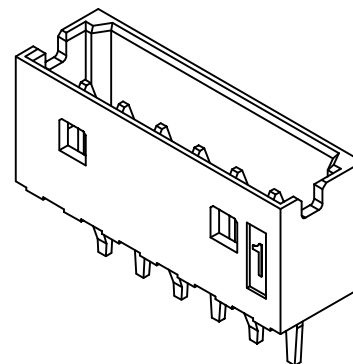



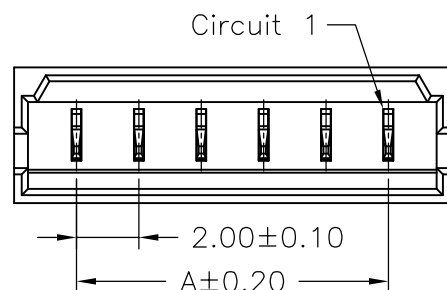

SPECIFICATIONS

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Phosphor Bronze/Tin-plated

Material: Nylon 66,UL94V-0

Pantone Color: 4685C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MH-D-02	2.00	6.00
MH-D-03	4.00	8.00
MH-D-04	6.00	10.00
MH-D-05	8.00	12.00
MH-D-06	10.00	14.00
MH-D-07	12.00	16.00
MH-D-08	14.00	18.00
MH-D-09	16.00	20.00
MH-D-10	18.00	22.00
MH-D-11	20.00	24.00
MH-D-12	22.00	26.00
MH-D-13	24.00	28.00
MH-D-14	26.00	30.00
MH-D-15	28.00	32.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MH-D-xx-LF
SERIES | LEADFREE
02~15 WAY
DIP 180°

DESCRIPTION: