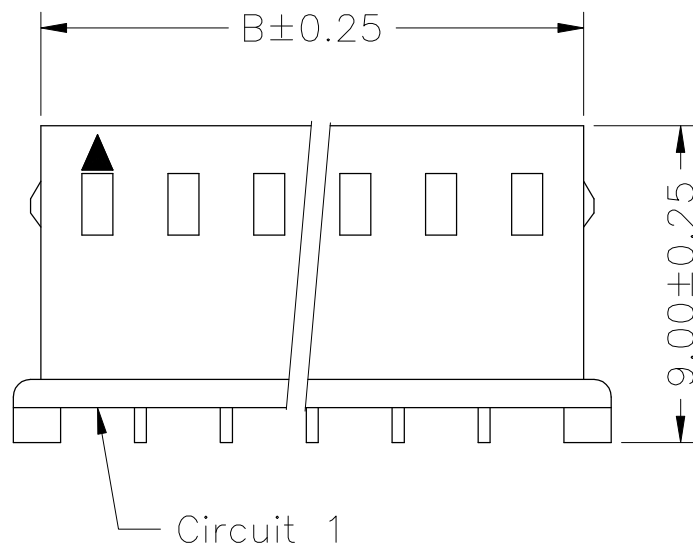
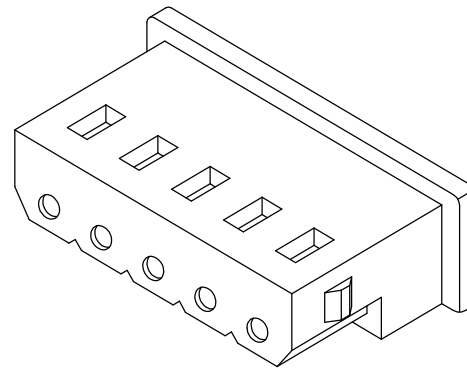
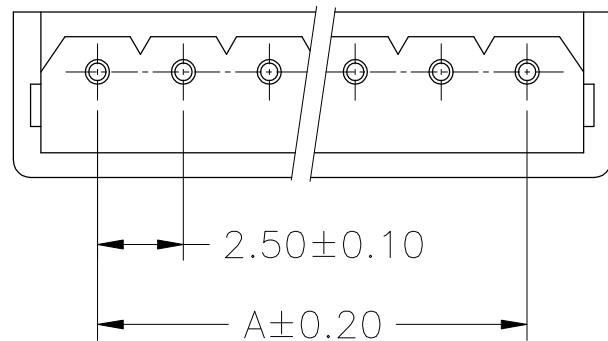


SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MW-H-02	2.50	5.80
MW-H-03	5.00	8.30
MW-H-04	7.50	10.80
MW-H-05	10.00	13.30
MW-H-06	12.50	15.80
MW-H-07	15.00	18.30
MW-H-08	17.50	20.80
MW-H-09	20.00	23.30
MW-H-10	22.50	25.80
MW-H-11	25.00	28.30
MW-H-12	27.50	30.80
MW-H-13	30.00	33.30
MW-H-14	32.50	35.80
MW-H-15	35.00	38.30
MW-H-16	37.50	40.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MW-H-xx-LF
SERIES | LEADFREE
02~16WAY
HOUSING

DESCRIPTION: 2.50mm PITCH HOUSING

煜倫股份有限公司

www.morethanall.com