
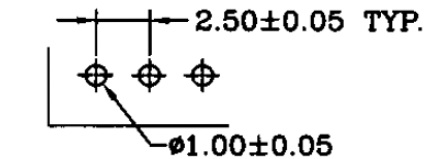




Material: *Insulator: Nylon 66 UL 94V-0 (Brown)






*Contact: Brass, Tin Plated.

Note: RoHS II and Halogen Free Compliance.

*Unit quantity: 500 Pcs/Bag

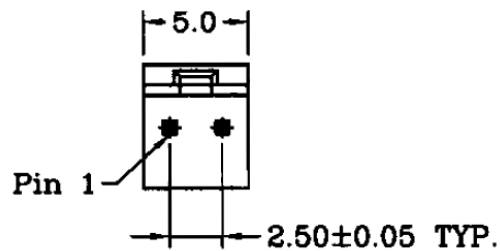

P.C.B. LAYOUT

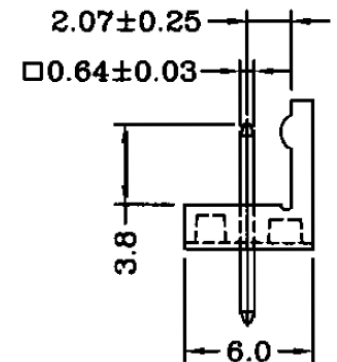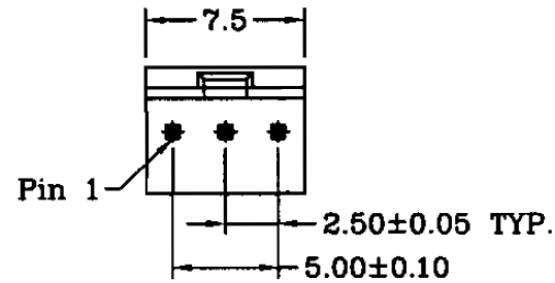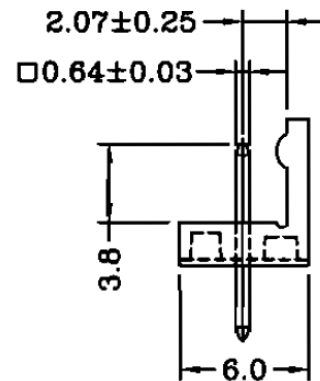

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION



X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±






ORDER INFORMATION

ILG-D-xx-LF
SERIES | T LEADFREE
02~06 WAY
DIP 180°

DESCRIPTION:

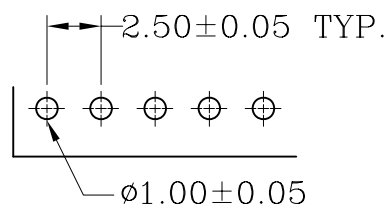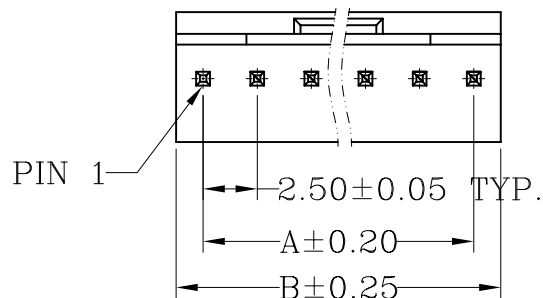

PCB LAYOUT

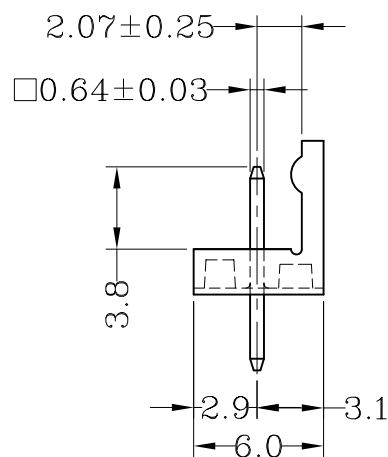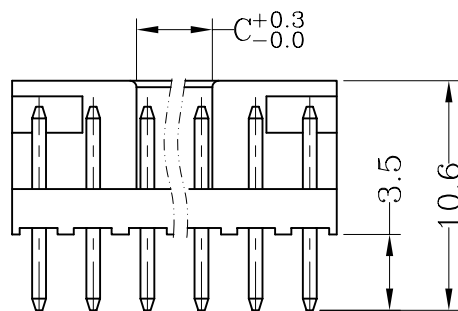

Material: *Insulator: Nylon 66 UL 94V-0 (Brown)
 *Contact: Brass, Tin Plated
 Note: RoHS and Halogen Free Compliance.

Dimensional & Ordering Information :

Circuits	Part No.	Dimensions			PCS/BAG
		A	B	C	
4	ILG-D-04	7.50	10.00	2.50	500
5	ILG-D-05	10.00	12.50	3.00	
6	ILG-D-06	12.50	15.00	3.50	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ILG-D-xx-LF
 SERIES | LEADFREE
 02~06 WAY
 DIP 180°

DESCRIPTION: