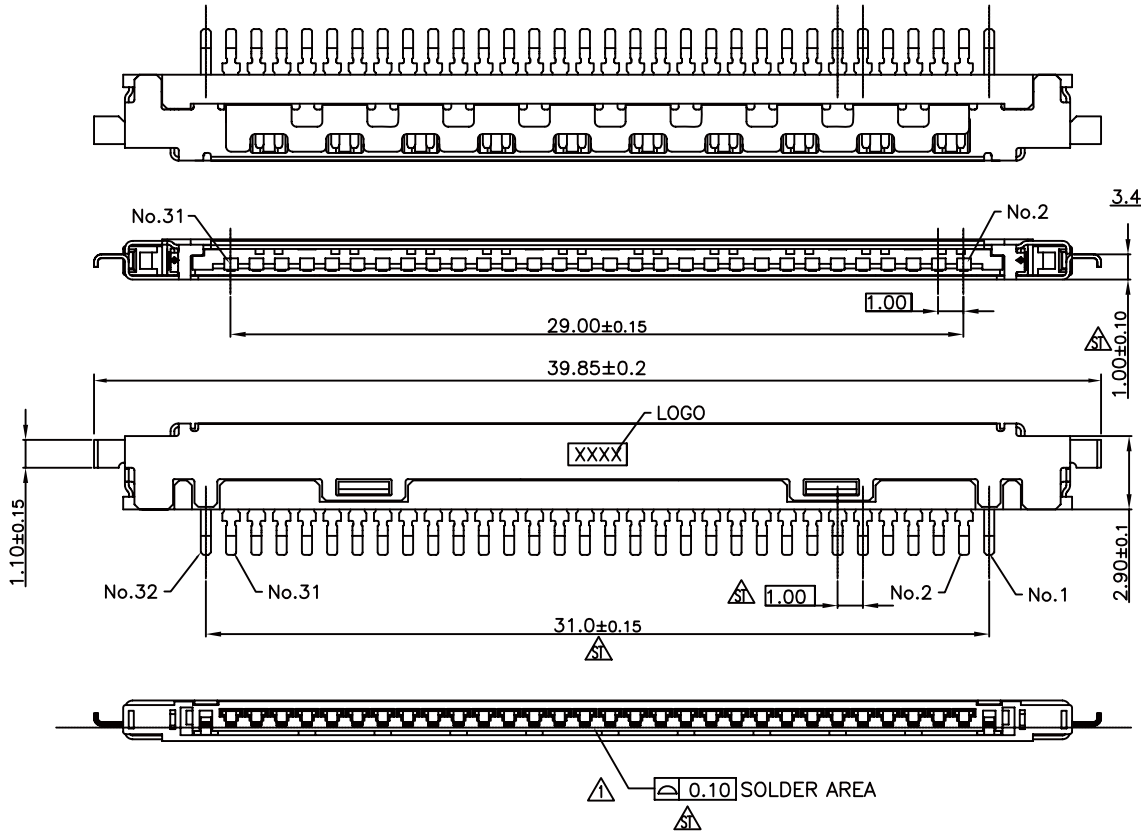

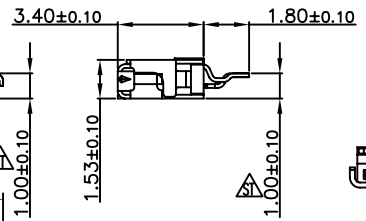

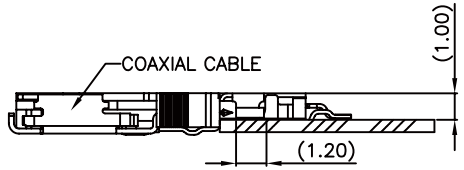

MATED CONDITION(REF)

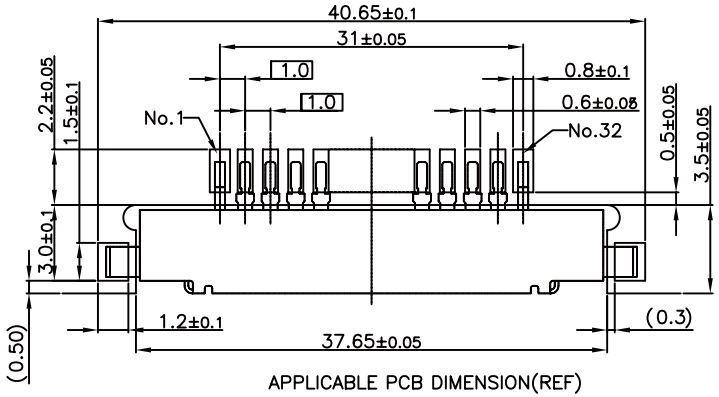

APPLICABLE PCB DIMENSION(REF)

NOTES:

1. MATERIAL: INSULATOR: LCP UL94V–0
   CONTACT: PHOSPHOR BRONZE
   SHELL: Ni–Ag ALLOY
2. CONTACT FINISH: 0.WITHOUT PLATING.
   1. 5u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
   2. 15u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
3. IMPORTANT AREA FLASH: 0.05mm MAX. DAMAGE: NA. DEFAME: NA.
4. LOGO TYPE: 1.WITH LOGO , 2. WITHOUT "TYCO" LOGO
5. PACKING TYPE: 1.REEL 2.TRAY 3.TUBE
6. ⚠ INSPECTING POINT

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± 0.20 .XX ± 0.10 .XXX ± ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

FIX-WXF10A-30-LF

SERIES
90°SMT
NON POST
OFFSET 1.0mm
TOP CONTACT
30WAY
LEADFREE

DESCRIPTION: