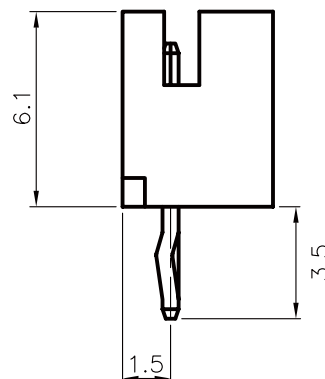
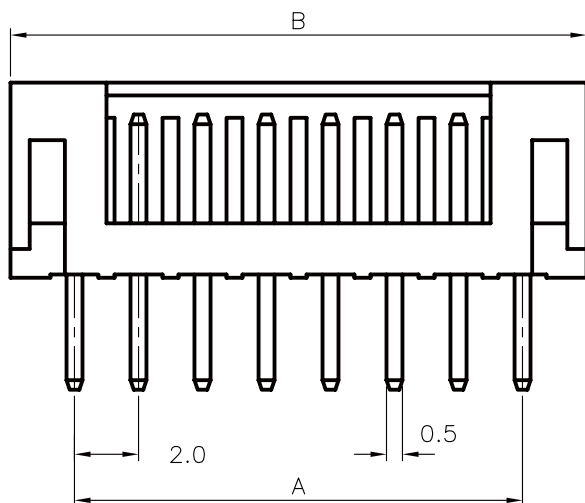
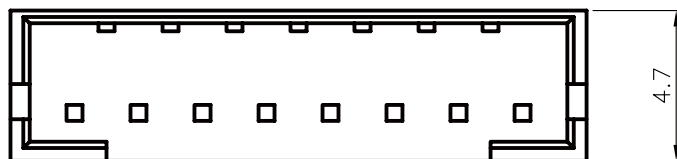


PCB HOLE LAYOUT

Poles	Ordering code	Dimension in.(mm)	
		A	B
2	ILS-D-02	0.079(2.0)	0.236(6.0)
3	ILS-D-03	0.157(4.0)	0.315(8.0)
4	ILS-D-04	0.236(6.0)	0.394(10.0)
5	ILS-D-05	0.315(8.0)	0.472(12.0)
6	ILS-D-06	0.394(10.0)	0.551(14.0)
7	ILS-D-07	0.472(12.0)	0.630(16.0)
8	ILS-D-08	0.551(14.0)	0.709(18.0)
9	ILS-D-09	0.630(16.0)	0.787(20.0)
10	ILS-D-10	0.709(18.0)	0.886(22.0)
11	ILS-D-11	0.787(20.0)	0.945(24.0)
12	ILS-D-12	0.886(22.0)	1.024(26.0)
13	ILS-D-13	0.945(24.0)	1.102(28.0)
14	ILS-D-14	1.024(26.0)	1.181(30.0)
15	ILS-D-15	1.102(28.0)	1.260(32.0)

WAFER

Poles: 2-15

Material: Post: Brass, Tin/Plated

Base: Nylon 66, UL94V-0

Q'ay: 1,000 pcs/bag

SPECIFICATION

CURRENT RATING: 3A AC, DC.

VOLTAGE RATING: 250 AC, DC.

TEMPERATURE: -25°C~+85°C.

CONTACT RESISTANCE: INITIAL VALUE/10m Ohm Max.

INSULATION RESISTANCE: 1000 M Ohm Min.

WITHSTANDING VOLTAGE: 800V AC/MINUTE.

APPLICABLE WIRE: AWG#28~#22

APPLICABLE PC BOARD THICKNESS: 1.6mm

S DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO PON'

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

ILS-D-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 180°

DESCRIPTION: tch 2.0mm Dip Type Top Entry P.C.B Connector