
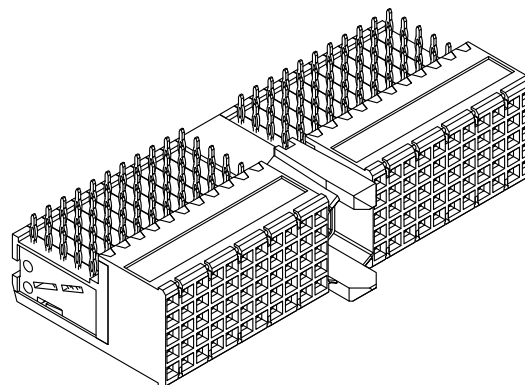


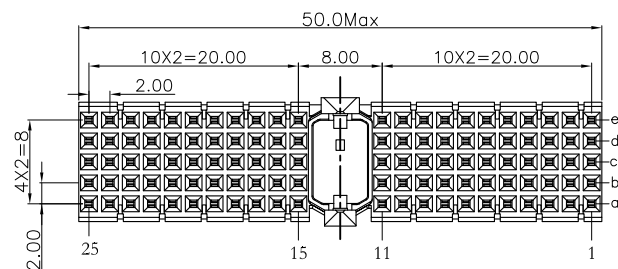

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 750V For 1 minute.

Insulator Resistance: 10000MΩ min. at DC 500V.



Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +125°C.


*RoHS Compliant

Notes:


Not bottom surface orient the post.

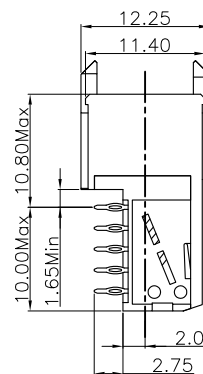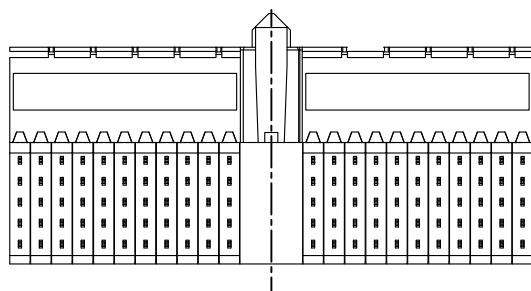


None Shielded



With Top Body Shielded



With Top Body Shielded
and Bottom Shielded

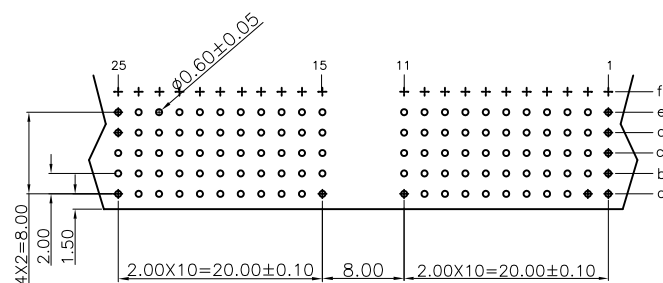

P.C. Board Layout
(Top View)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

HM7A-SQxXP-110-LF

SERIES | 110 WAY | LEADFREE

NON POST

FEMALE X: NONE SHIELDED

90° PRESS FIT T: WITH TOP BODY SHIELDED

A: WITH TOP BODY SHIELDED AND BOTTOM SHIELDED

DESCRIPTION: