
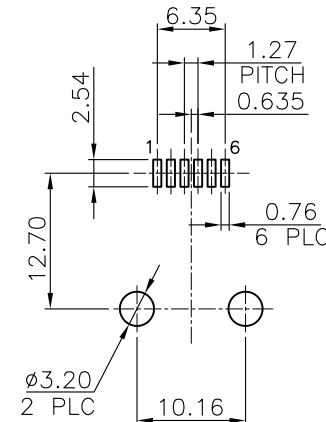
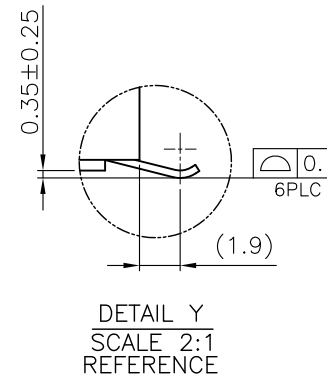
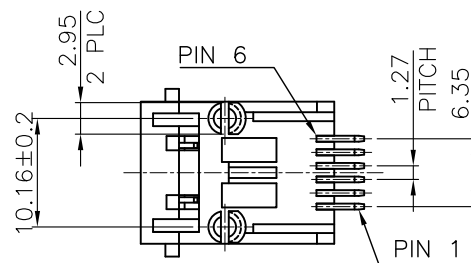
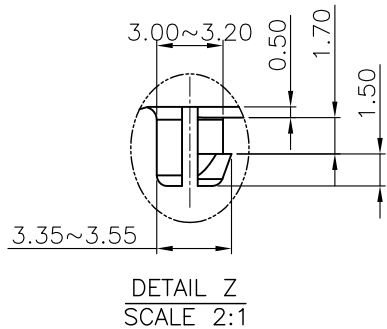


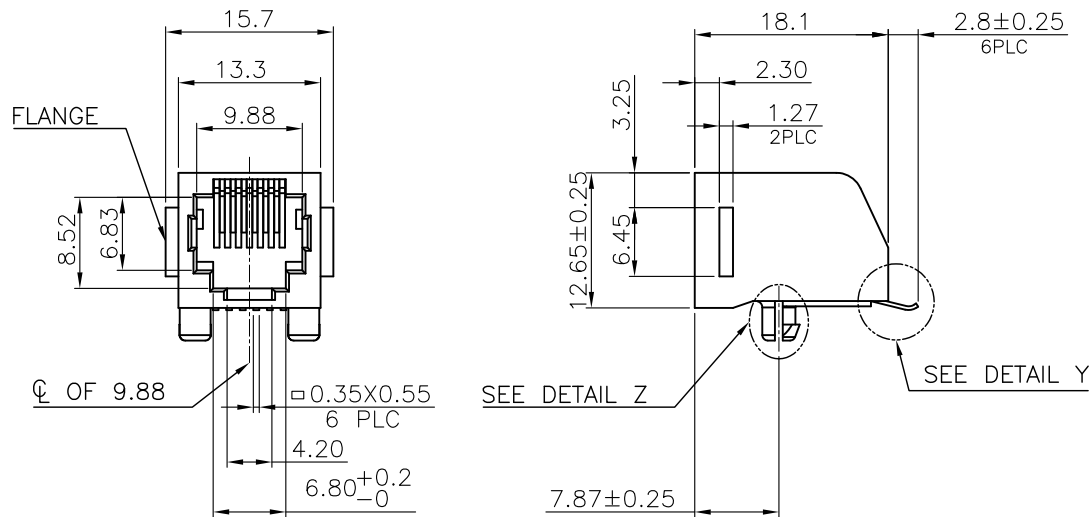

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

1. MATERIAL:
HOUSING: PA9T, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.
CONTACTS: PHOSPHOR BRONZE.
2. FINISH:
CONTACTS: $0.152\mu\text{m}$ [$6\mu''$] GOLD PLATED ON CONTACT AREA,
GOLD FLASH PLATED ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG $\pm$

PPOJECTION




ORDER INFORMATION

MJW12J-KE06P-0606-LF

SERIES POST 6P6C LEADFREE
EAR 06u" GOLD BLACK

DESCRIPTION: 6POSITION, SMT, LOW PROFILE, SIDE ENTRY PCB JACK

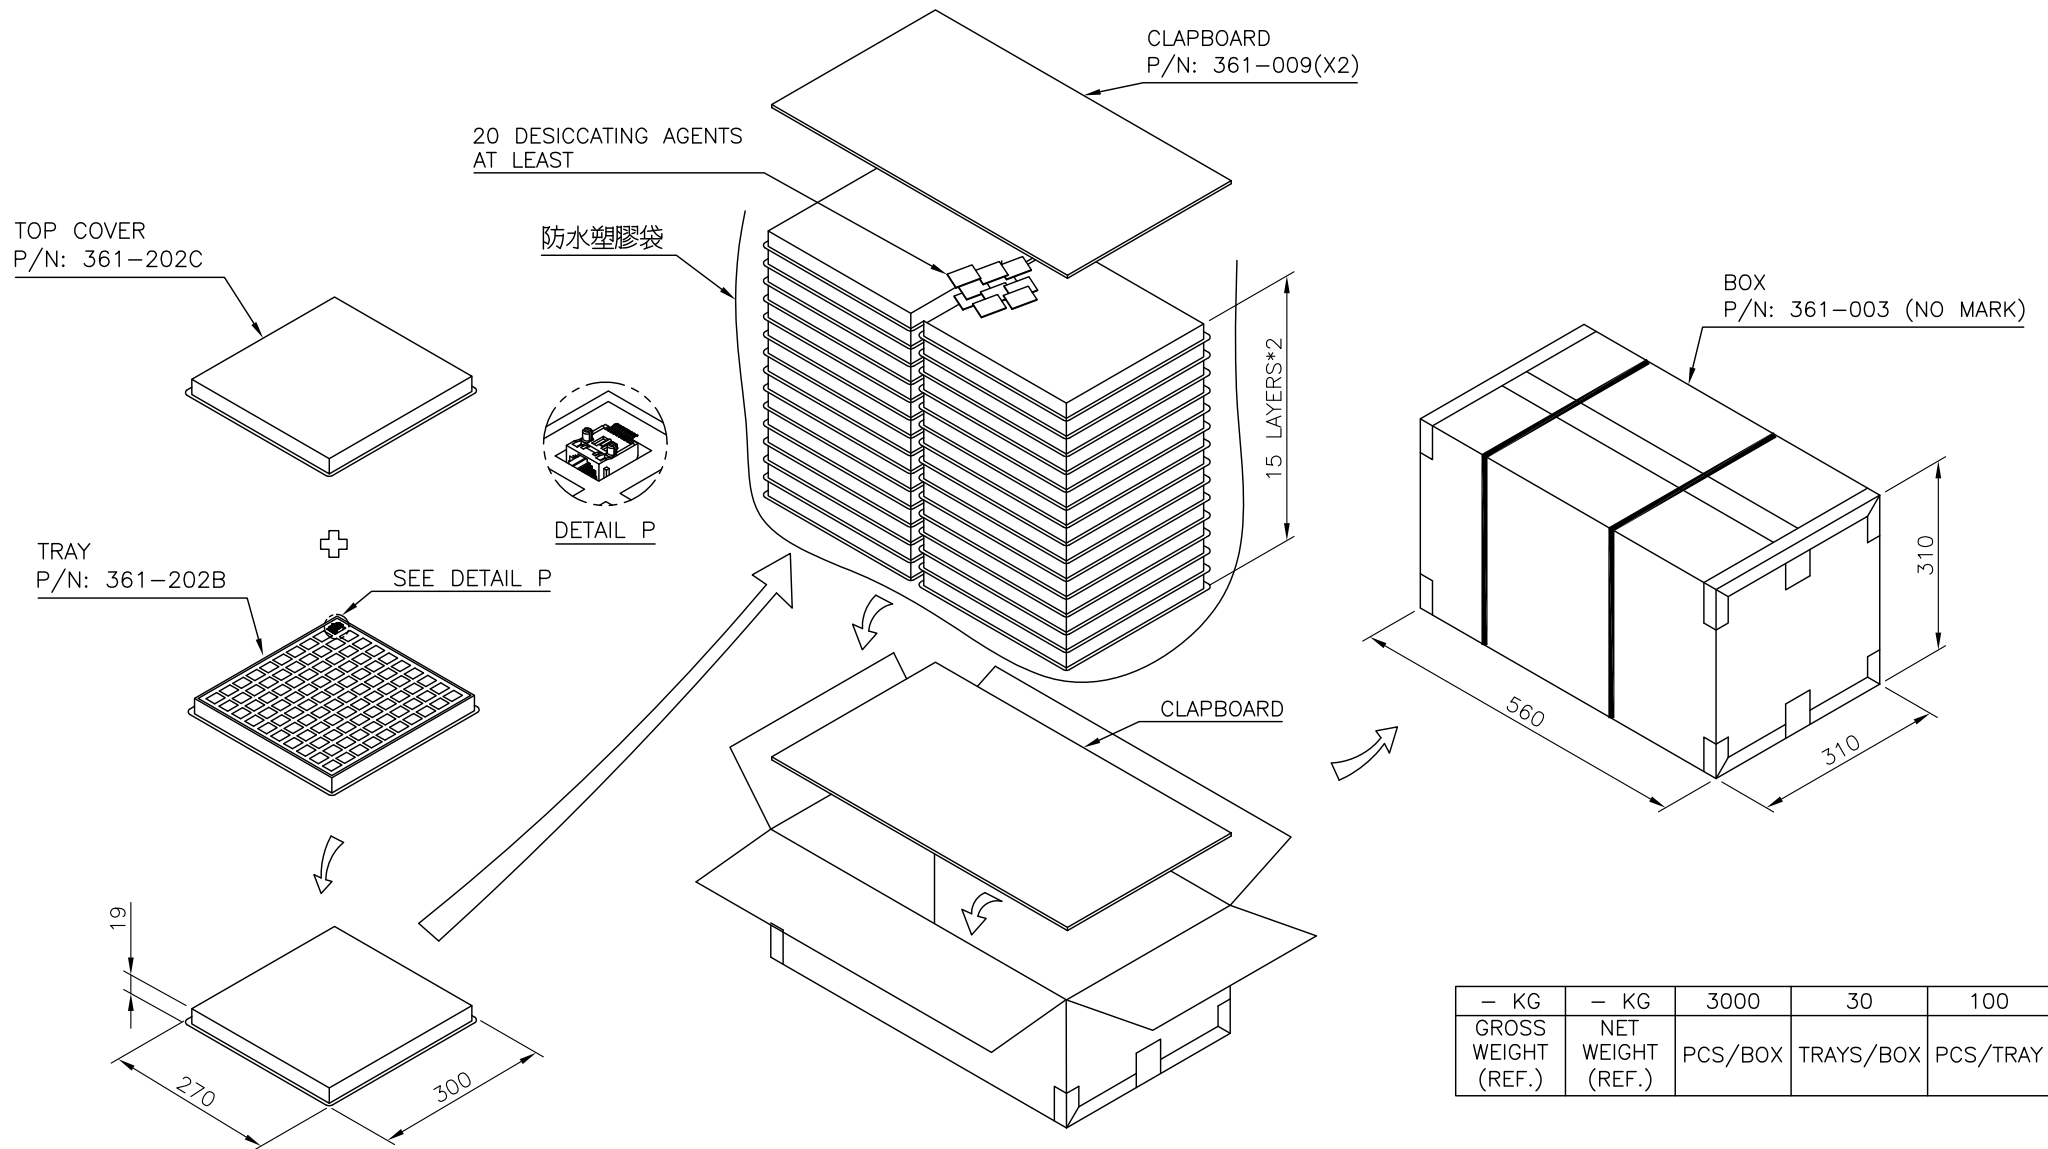

— KG	— KG	3000	30	100
GROSS WEIGHT (REF.)	NET WEIGHT (REF.)	PCS/BOX	TRAYS/BOX	PCS/TRAY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION



ORDER INFORMATION

MJW12J-KE06P-0606-LF

SERIES

POST

EAR

BLACK

06u" GOLD

6P6C

LEADFREE

DESCRIPTION: TRAY PACKAGE