


PIN NO.	NAME
#01	DAT2
#02	CD/DAT3
#03	CMD
#04	VDD
#05	CLK
#06	V _{ss2}
#07	DAT0
#08	DAT1
#09	CARD DETECT Switch
#10	CARD DETECT Com.
#11	GND

NOTES :

1. MATERIAL :
 INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING : UL94V-0 COLOR : BLACK
 CONTACT : COPPER ALLOYS
 COVER : STAINLESS STEEL

2. CONTACT AREA PLATING : GOLD OVER Ni

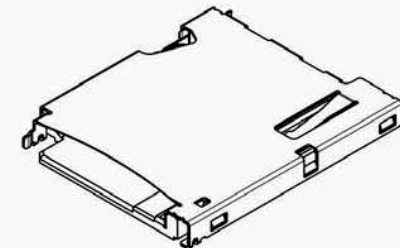

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±


PPOJECTION




ORDER INFORMATION

TFC-WPBE13BR-08-LF
 SERIES | | | | | | | | | | LEADFREE
 90°SMT REEL 08WAY
 PUSH PUSH B TYPE
 EAR 13.0mm
 BOTTOM CONTACT

DESCRIPTION:

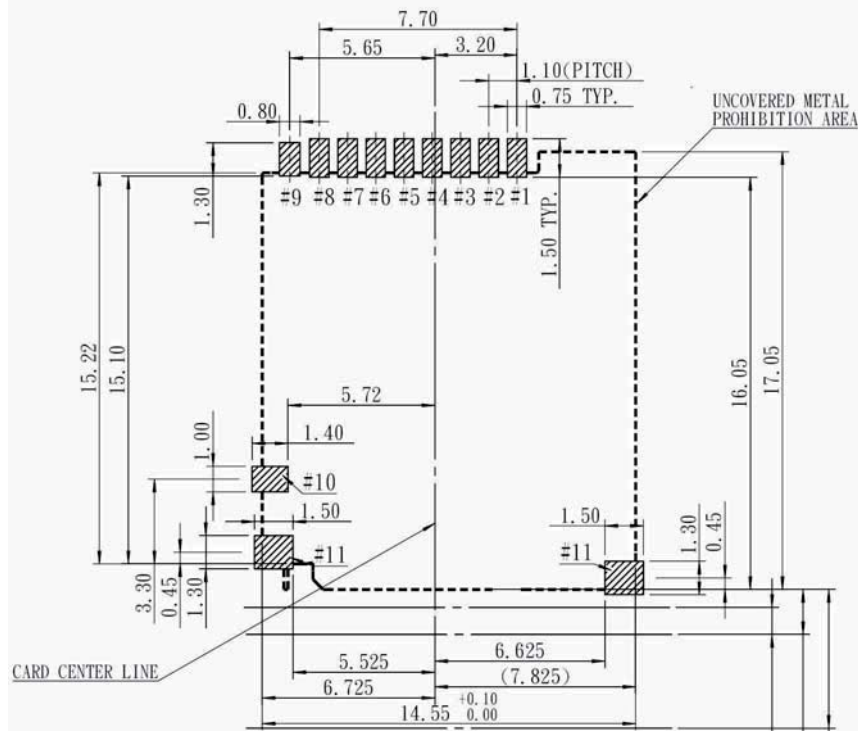


RECOMMEND P. C. B. LAYOUT
TOLERANCE ± 0.05

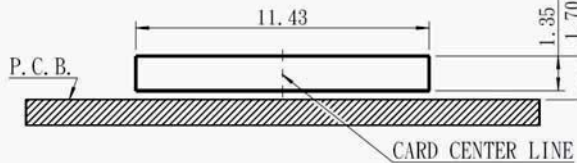

RECOMMEND CARD SLOT
TOLERANCE ± 0.05

(1.05) Push Stroke
(1.75) Card Lock Position
(5.40) Ejector Position

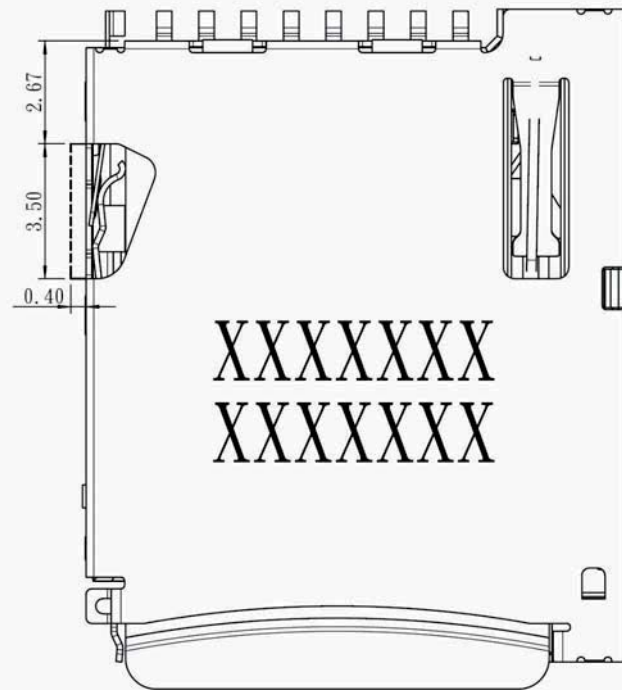

A SIZE WHEN A HOOK PART
OPERATES (MAX. 0.4mm)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, \pm


.X \pm

.XX \pm

.XXX \pm

ANG \pm



PPOJECTION



ORDER INFORMATION



TFC-WPBE13BR-08-LF
SERIES T T T T T T T T T T LEADFREE
90°SMT REEL 08WAY
PUSH PUSH B TYPE
EAR 13.0mm
BOTTOM CONTACT

DESCRIPTION:

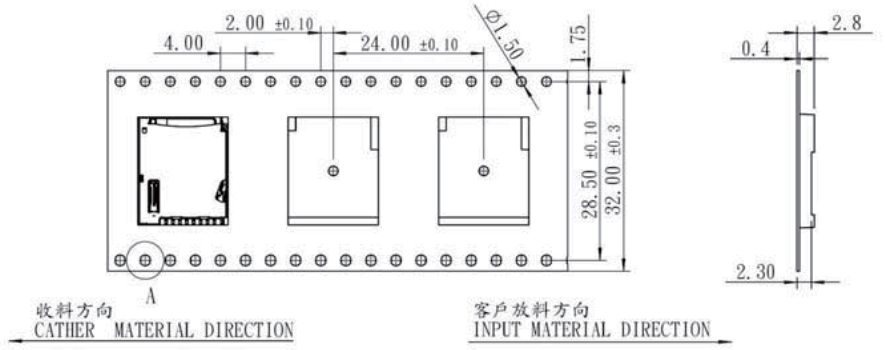

Package Information

Part Number	Qty per reel
	750 PCS

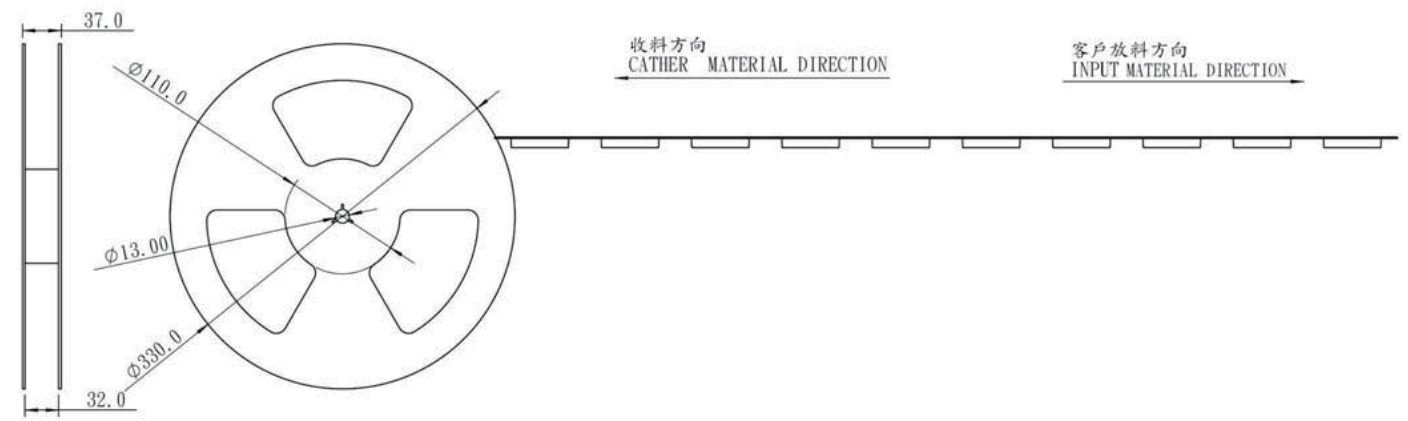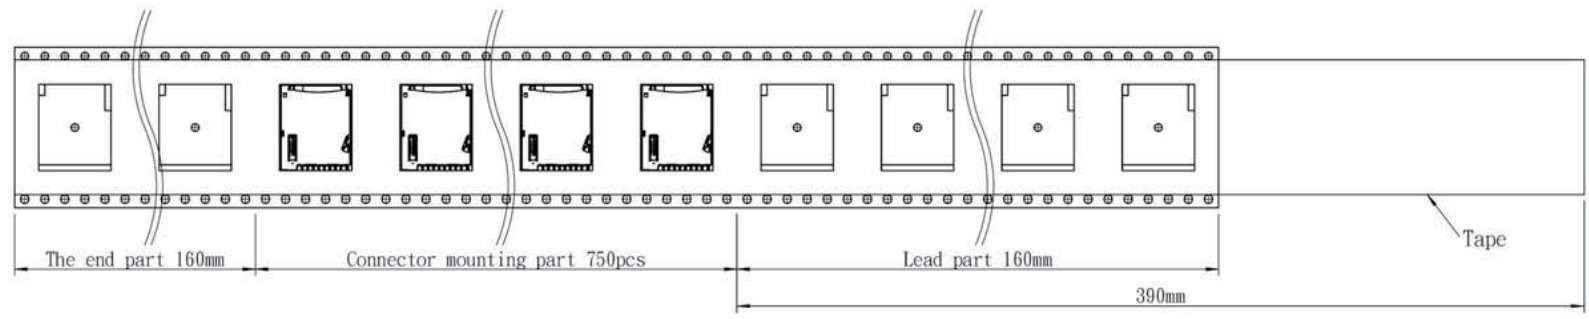


RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		
UNIT / mm	SCALE 1:1	X, ±
DATE		.X, ±
SIZE A4	P PROJECTION	.XX, ±
		.XXX, ±
		ANG, ±



ORDER INFORMATION

TFC-WPBE13BR-08-LF

SERIES TFC WPBE13BR 08 LF LEADFREE

90°SMT REEL 08WAY

PUSH PUSH B TYPE EAR 13.0mm

BOTTOM CONTACT

DESCRIPTION: