
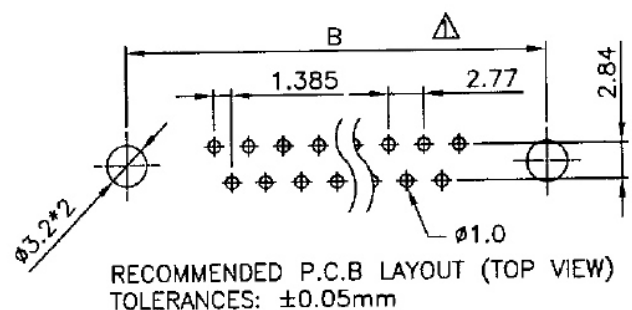

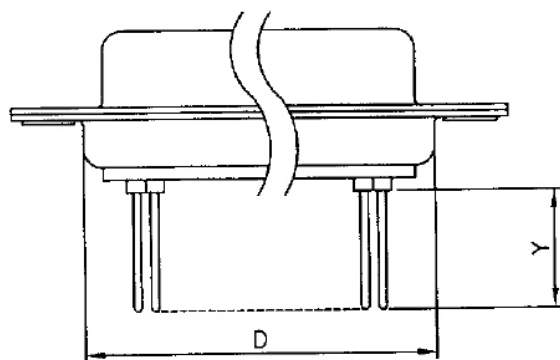


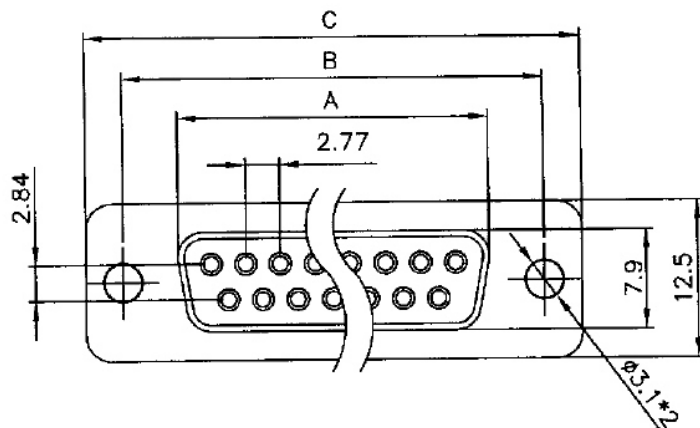

CONTACT LENGTH
DIM. FOR "Y":

13	13.0mm
09	9.5mm

POSITION	A	B	C	D
9F	16.30	25.00	30.8	19.2
15F	24.60	33.30	39.2	27.7
19F	30.00	38.86	44.8	32.8
23F	35.30	44.30	50.3	38.3
25F	38.30	47.10	53.1	41.1
37F	54.80	63.50	69.4	57.3

△ SPECIFICATION MATERIAL

Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Shell: Steel

△ CONTACT PLATING

Underplate: 50u" Nickel
Contact Area: 5u"~30u" Selective Gold

ELECTRICAL

Operation Voltage: 250 VAC Max.
Current Rating: 3 Amps Max.
Contact Resistance: 15 mohms Max.
Insulation Resistance: 3000 Mohms Min @ 500 VDC
Dielectric Withstanding Voltage: 1000 VAC / Minute
Operating Temperature: -55°C To +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DDL-Sxx-xx-LF
SERIES | LEADFREE
09~37WAY
09:DIP 9.5mm
13:DIP 13.0mm
FEMALE

DESCRIPTION: