

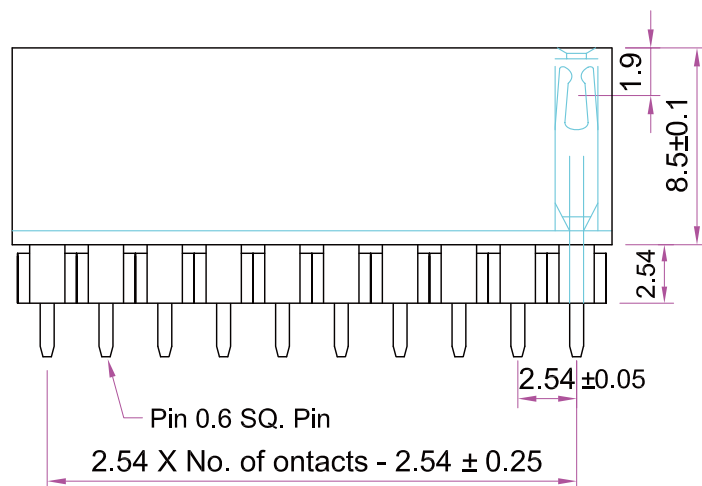
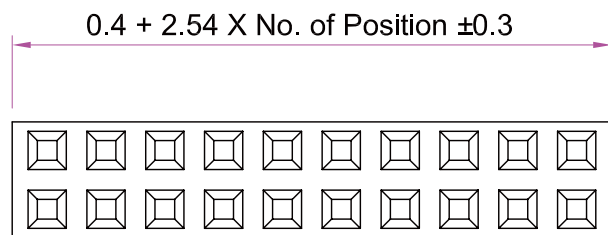


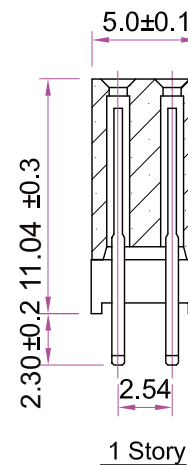

Recommended
P.C. Board Hole Layout

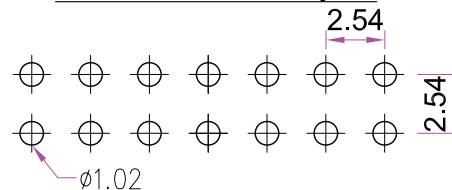

Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V

Operating Temperature : -40°C ~ +105°C

Contact Material : Brass

Insulator Material : Polyester, UL 94V-0 P.B.T.

Option: Nylon-6T.

Contact Plated : See Option

Standard: Full Gold Flash

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

FE-D13A-2Xxx-LF
SERIES | LEADFREE
2X02:02WAY
2X40:40WAY
TOTAL HIGH 13.34mm
DIP 180°

DESCRIPTION: Female Header P2.54mm Elevated Story, Doul Row, Straight Type