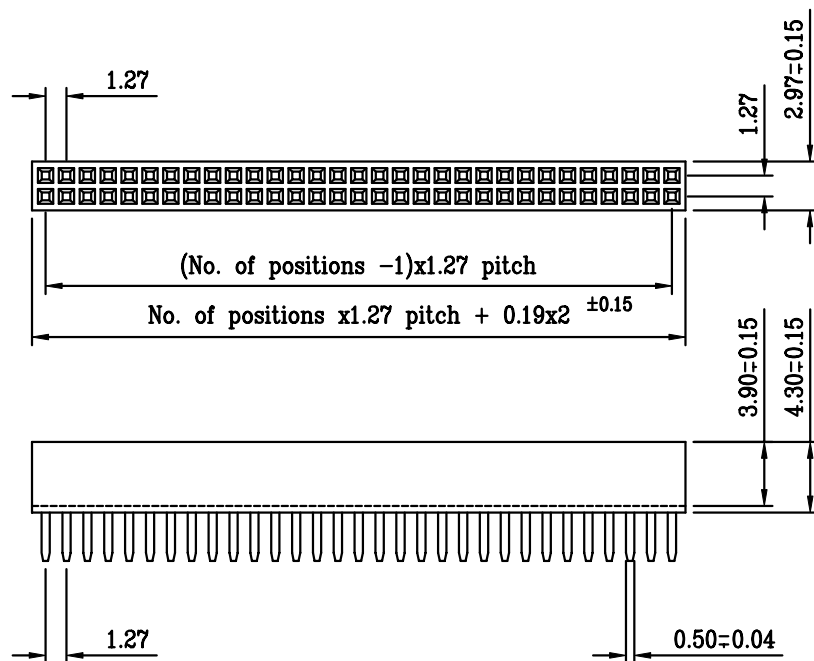


P.C.B. layout

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.20


.X ± 0.15

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

YA-D43-2Xxx-LF
SERIES | LEADFREE
2X03:06WAY
2X50:100WAY
HIGH 4.3mm
DIP 180°

DESCRIPTION: Dual Row 1.27x1.27 DIP (H=4.3mm)