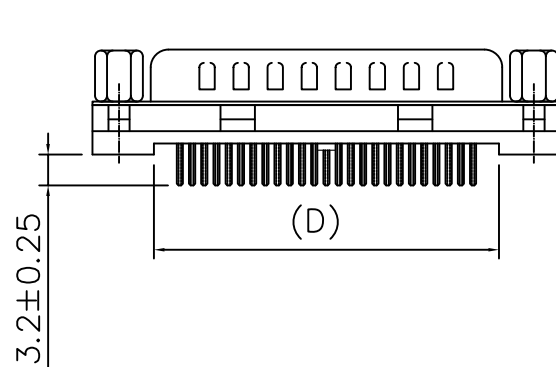
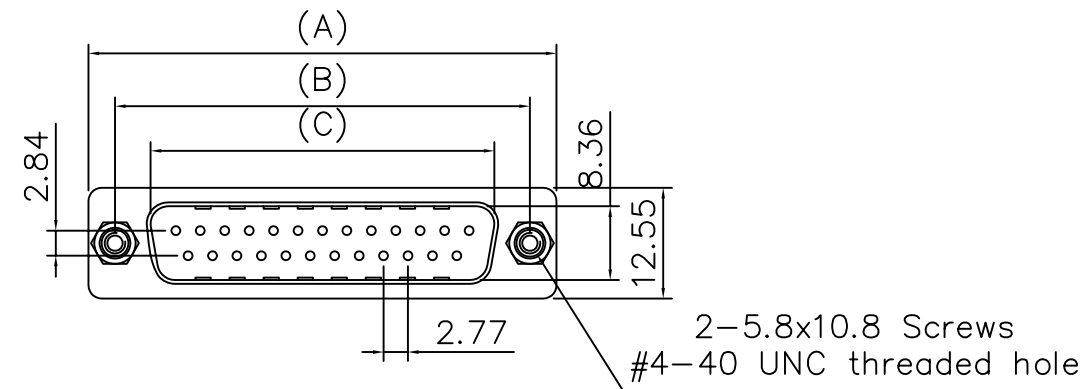


Recomended PCB Layout

Specifications

Contact Resistance: $\leq 30m$ max. at DC
100mA

Insulator Resistance: $1000M$ min. at DC
500V

Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute

Operating Temperature: $-55^{\circ}C \sim +105^{\circ}C$

Contact: Brass

Housing: PBT & 30% Glass Fiber (UL
94V-0)

Dimension

Positon	A	B	C	D
09	30.81	24.99	16.92	16.96
15	39.14	33.32	25.50	25.18
25	53.04	47.04	38.96	39.12
37	69.32	63.50	55.42	55.68

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

DDM-PNJ-xx-LF
SERIES T T LEADFREE
09-37WAY
JACKSCRW
NUT
MALE

DESCRIPTION: D-SUB DIP STRAIGHT TYPE W/O METAL REAT SHELL