
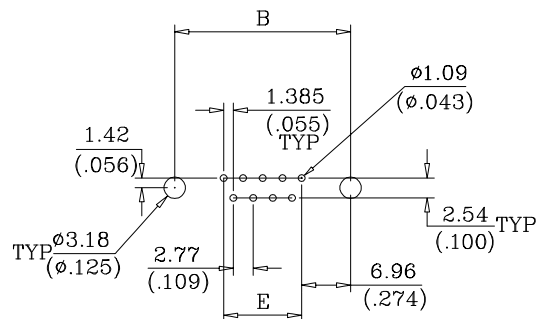
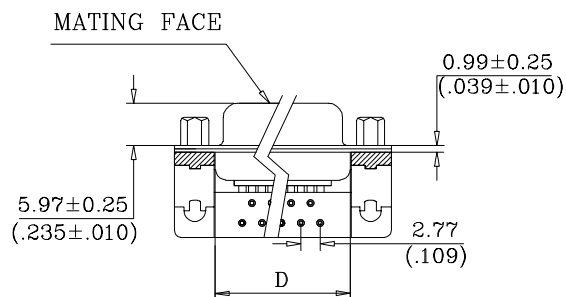



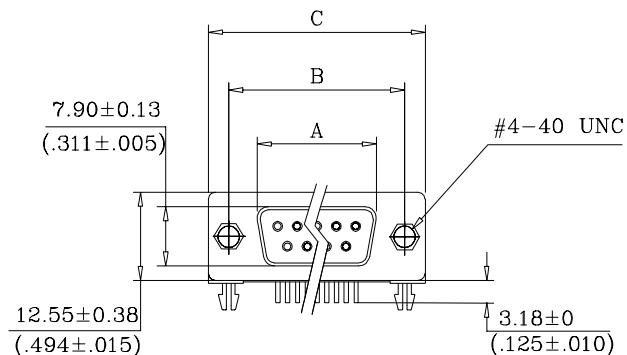

P.C.B. LAYOUT

No. of Contact	A ± 0.25 $\pm .010$	B ± 0.13 $\pm .005$	C ± 0.38 $\pm .015$	D ± 0.25 $\pm .010$	E
25	38.38 1.511	47.04 1.852	53.04 2.088	41.28 1.625	33.24 1.310

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, WHITE COLOR
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +150°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

DR941-SZJ-25-LF

SERIES T LEADFREE
 25 WAY
 JACKSCREW
 CLIP
 FEMALE

DESCRIPTION: D-sub Machined Pin .37" Footprint