

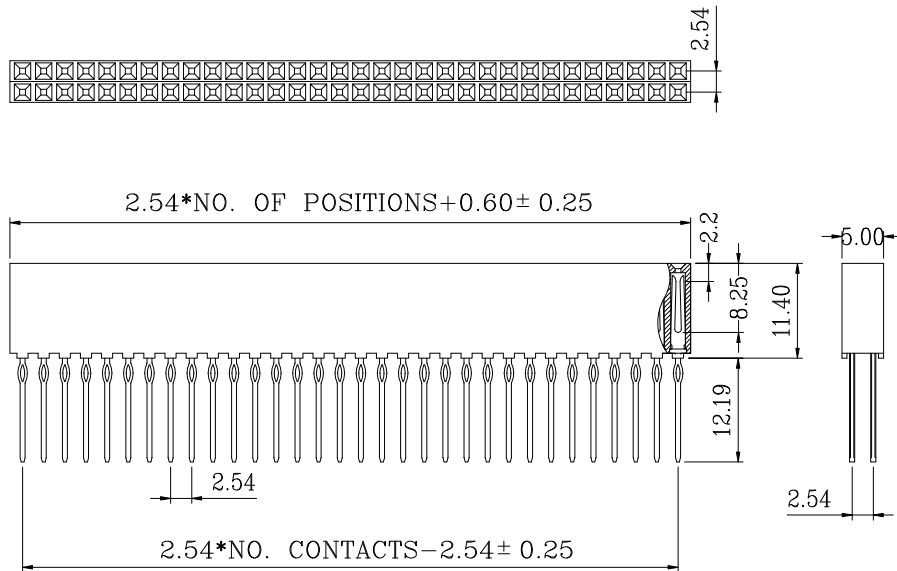


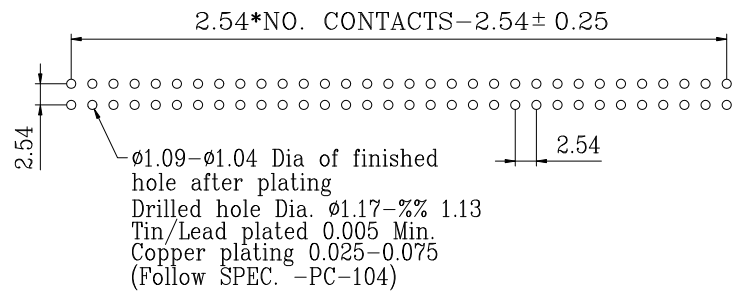

SPECIFICATIONS
 CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5000 MEGPHMS MIN.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

MATERIAL
 CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)
 INSULATOR: PA-9T, UL 94V-0

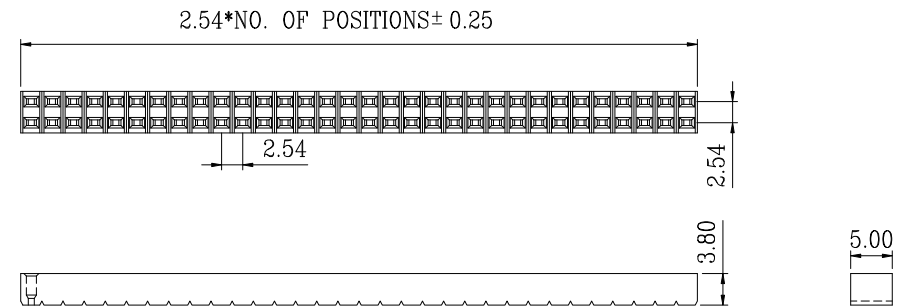

Recommend P.C.B. Layout
 TOP View

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
 .X. ± 0.35
 .XX ± 0.25
 .XXX ± 0.05
 ANG $\pm$



ORDER INFORMATION

FE-P23-2Xxx-LF
 SERIES LEADFREE
 2X03:06 WAY
 2X40:80 WAY
 TOTAL HIGH 23.9mm
 PRESS FIT

DESCRIPTION: PC-104 Connector