




PART NO	dimension
	<b>A</b>
SDC-W26PA-09	<b>0.10</b>
SDC-W26PA18-09	<b>1.80</b>
SDC-W26PA24-09	<b>2.40</b>

1. MATERIAL :

HOUSING : GLASS- FILLED THERMO-PLASTIC.UL94V-0  
 CONTACT : COPPER ALLOY  
 COVER : STAINLESS STEEL  
 SPRING : STAINLESS STEEL


2. SPECIFICATION

VOLTAGE RATING : 100VAC RMS MAX  
 CURRENT RATING : 0.5A MAX  
 OPERATING TEMPERATURE : -25°C ~ +60°C  
 INSULATION RESISTANCE: 1000 MΩ Min  
 CONTACT RESISTANCE: 100 mΩ Max

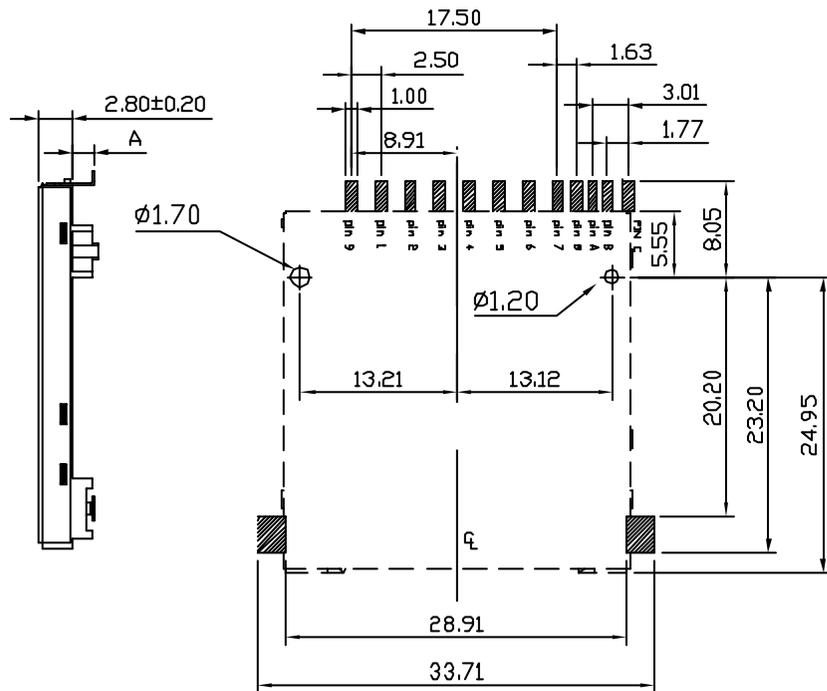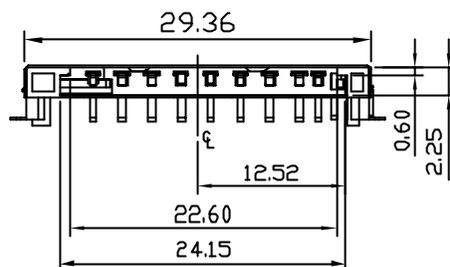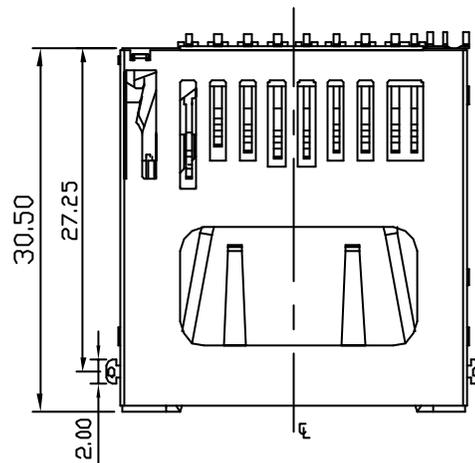

PCB LAYOUT

General Tolerances ±0.05

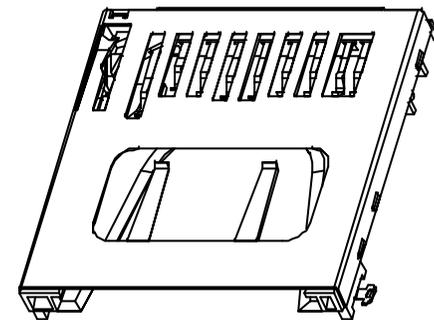

RoHS Compliant

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PJECTION



ORDER INFORMATION

SDC-W26PAxx-09-LF

SERIES | | | | LEADFREE  
 | | | | 09 WAY  
 | | | | 18:STAND OFF 1.8mm  
 | | | | 24:STAND OFF 2.4mm  
 90°SMT | | | | UPPER CONTACT  
 POST 26.41mm | | | | PUSH PUSH

DESCRIPTION: SD CONNECTOR PUSH REVERSE SMT TYPE