


Current Rating (AMP)	Wire Size	Dimension	
		ø A	ø B
40	AWG#08	4.6<.181>	5.5<.217>
30	AWG#10	3.6<.142>	4.6<.181>
20	AWG#12	2.7<.106>	3.6<.142>
10	AWG#16	1.7<.067>	2.5<.098>
5	AWG#26	1.0<.039>	1.7<.067>

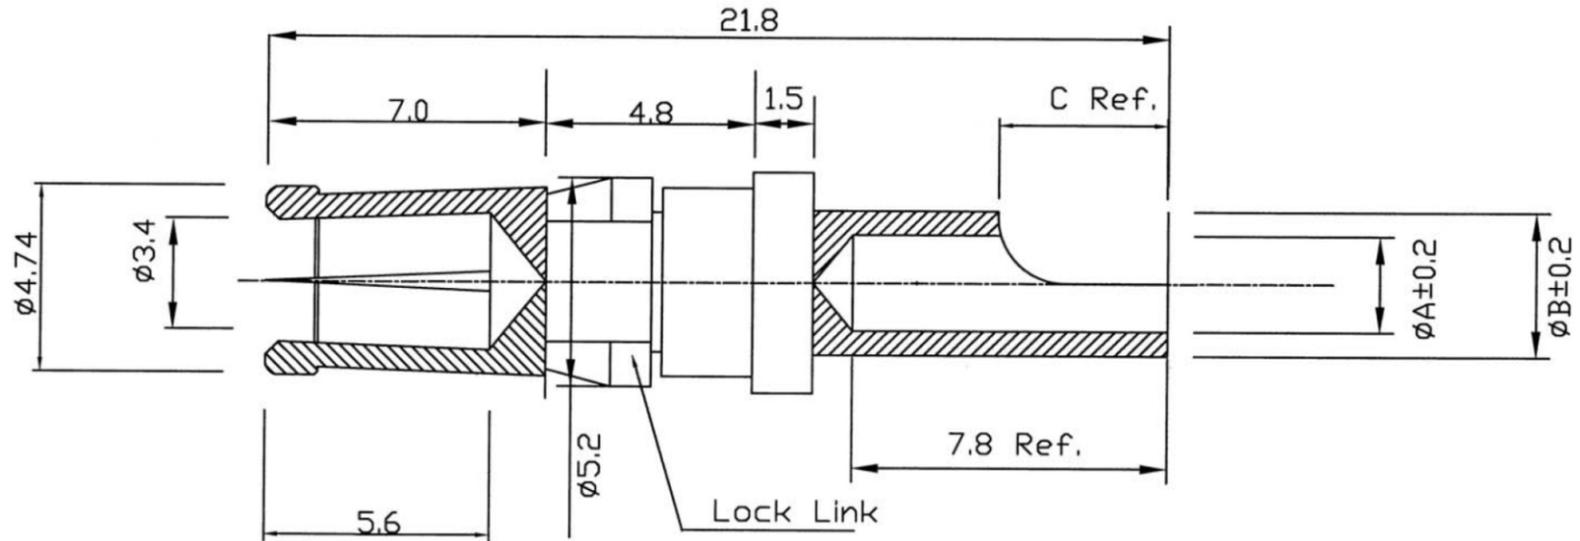

2.	Body Contact	Brass	Gold Plated over Nickel
1.	Lock Link	Brass	Nickel Plated
NO.	Description	Material	Finished or others

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION



ORDER INFORMATION

DWS-F-xx-LF

SERIES | LEADFREE

40:40AMP  
30:30AMP  
20:20AMP

FEMALE | 10:10AMP  
05: 5AMP

DESCRIPTION: