



Pin Type	Interface Dim L	Pin Type
Detect	3.5 mm	25,26
General	4.25 mm	All Other Pins
Power	5.0 mm	1,13,38,50

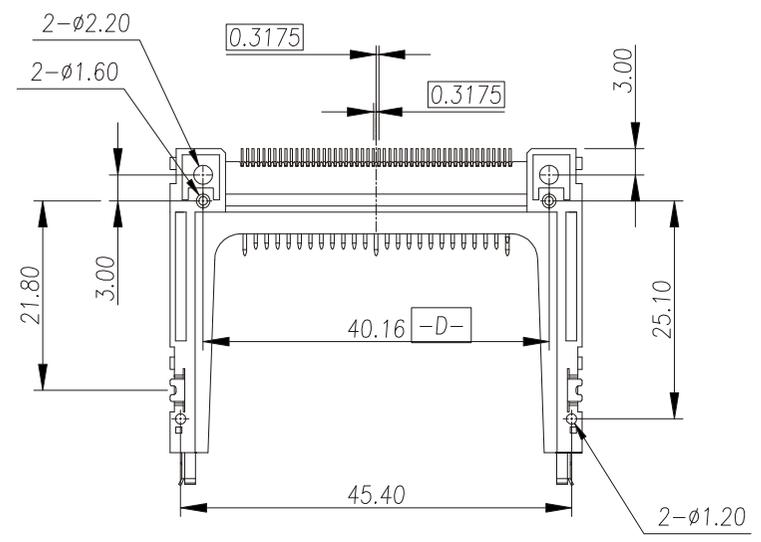

Ordering Information:

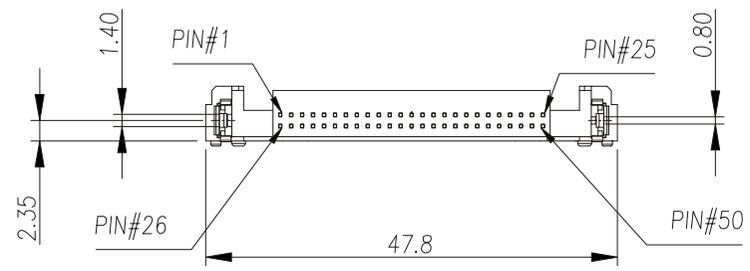

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±


DATE

.XXX±

ANG ±


SIZE A4

P PROJECTION



**ORDER INFORMATION**


**CFC-PW40CE201HRS-50-LF**

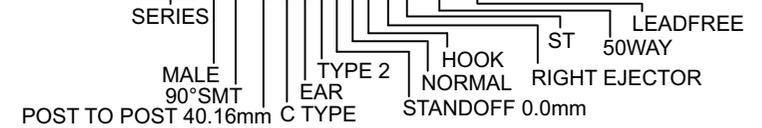


**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DESCRIPTION: CF TYPE2 ,50PIN SMT NORMAL TYPE

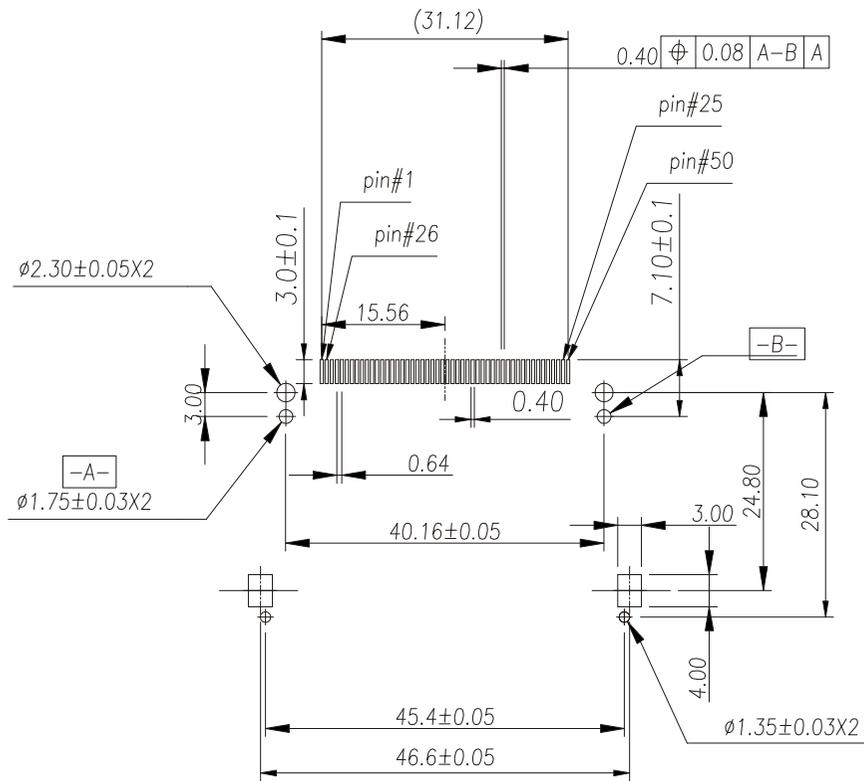

P.C.B Layout

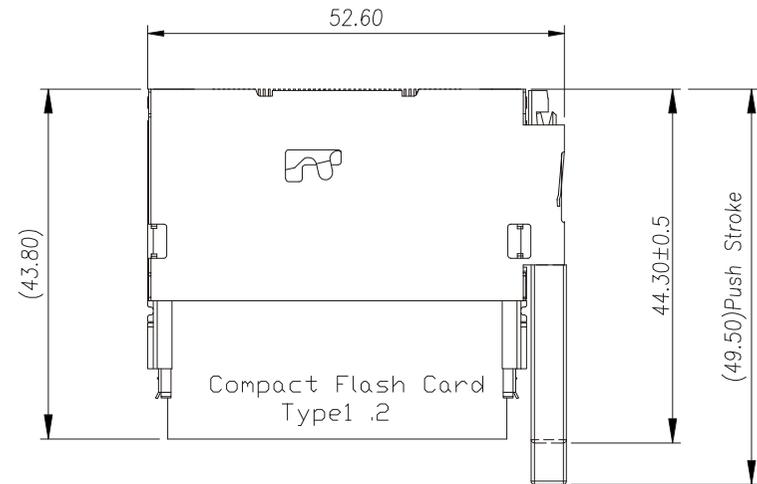

Header With Ejector

SPECIFICATIONS:

- HOUSING : High Temperature Plastic, UL 94V-0
- CONTACT : Copper Alloys
- VOLTAGE RATING : 100VAC
- CURRENT RATING : 0.5A
- CONTACT RESISTANCE:40 m Ohm max.
- INSULATION RESISTANCE:1000M Ohm min.
- DIELECTRIC STRENGTH : 500VAC/1min
- OPERATION TEMPERATURE : -40°C~85°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES


DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE

X.±  
.X±  
.XX±  
.XXX±  
ANG±

**煜倫股份有限公司**

www.morethanall.com

SIZE A4 PPROJECTION



**ORDER INFORMATION**

**CFC-PW40CE201HRS-50-LF**  
SERIES | TYPE 2 | HOOK | ST | LEADFREE  
MALE | EAR | NORMAL | RIGHT EJECTOR  
90°SMT | C TYPE | STANDOFF 0.0mm  
POST TO POST 40.16mm

DESCRIPTION: CF TYPE2 ,50PIN SMT NORMAL TYPE