
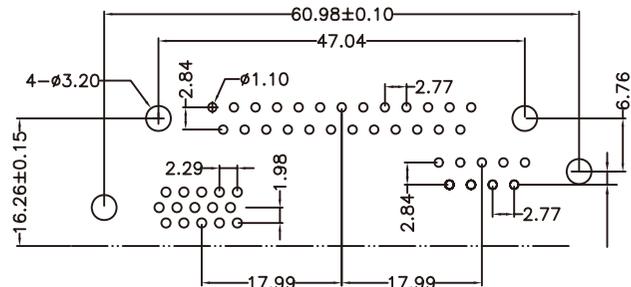
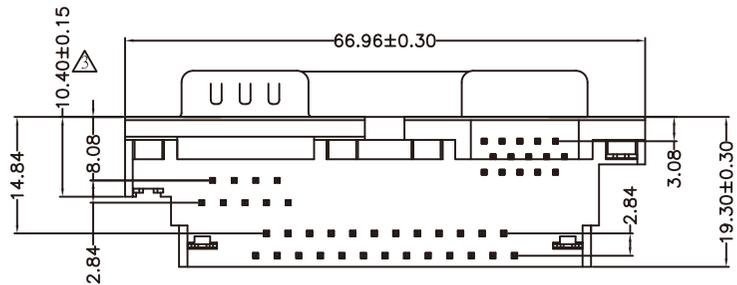


NOTES:

1. MATERIAL
 - 1.1 INSULATOR:PBT+25%G.F (UL94-V-0)
 - 1.2 CONTACT:BRASS.T=0.2 C2680-SH
 - 1.3 SHELL:COLD ROLLER STEEL T=0.4,
2. FINISH
 - 2.1 CONTACT:
 - 100u" TIN UNDERPLATED ENTIRE THE CONTACT SURFACE.
 - 1u" MIN Au PLATED ON THE CONTACT AREA
 - 2.2 SHELL
 - 100u" NICKEL UNDERPLATED ENTIRE THE SHELL SURFACE.
3. ENVIRONMENTAL:
 - 3.1 OPERATING TEMPERATURE:-55°C~+105°C
4. ELECTRICAL
 - 4.1 CONTACT CURRENT RATING:5Amp
 - 4.2 DIELECTRIC WITHSTANDING:AC 1000V min.per minute
 - 4.3 INSULATION RESISTANCE:>5000 MOHMS min.at 500V DC
 - 4.4 CONTACT RESISTANCE:25 MOHMS MAX
 - 4.5 CONTACT INSERTION FORCE: 5kg MAX
 - 4.6 CONTACT SEPTATION FORCE: 60g/PIN MIN.

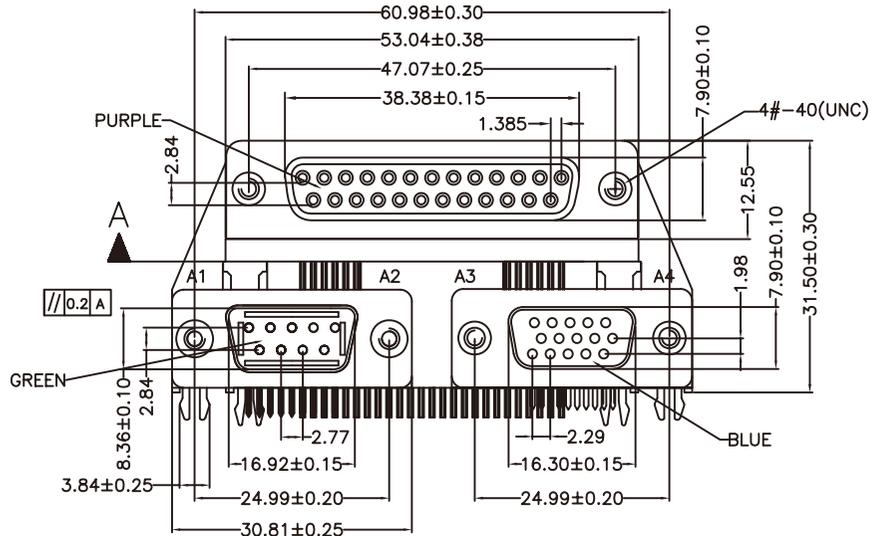

P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

DRB1-FN3-2593-LF

SERIES

LEADFREE

25 TO 09/15 WAY

3.08mm

NUT

FEMALE TO MALE/ FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: D-SUB25F+9M+15F LEAD FREE