

	C±0.17	D±0.17
1.8V	17.67	52.77
2.5V	16.77	53.67

DETAIL A VOLTAGE OPTION

NOTES:

1. MATERIAL:

- 1.1 HOUSING: LCP WITH 30% G.F. UL 94V-0
- 1.2 CONTACT: BRASS
- 1.3 LATCH: STAINLESS

2. FINISH:

- 2.1 CONTACT: GOLD PLATED ON CONTACT & SOLDERING END OVER 50u" MIN. NICKEL UNDER-PLATING.
- 2.2 LATCH: 60~100u" SN ONLY (MATTE) PLATING OVER 50u" MIN. NICKEL UNDERPLATING

**RoHS Compliant**

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

PJECTION













**ORDER INFORMATION**

**SDM6-W92Vxx-40A6-LF**

SERIES	LEADFREE	
	40+160 WAY	
	V18:1.8V	
	V25:2.5V	
HIGH:9.2mm		
90°SMT		

DESCRIPTION: DDR S.O.DIMM SOCKET 0.6MM PITCH, 200 PIN, 9.2 MM HEIGHT, STANDARD B-TYPE (RoHS)

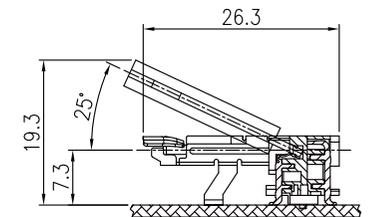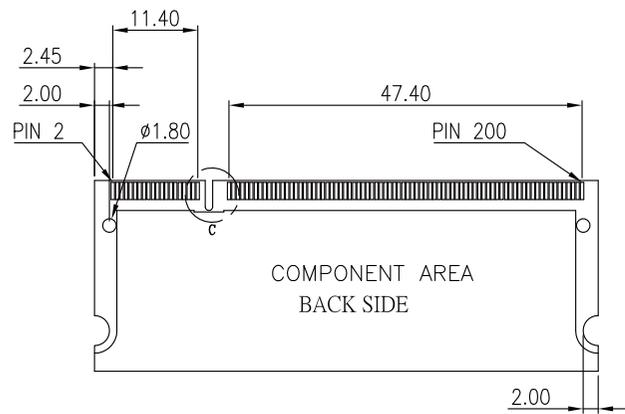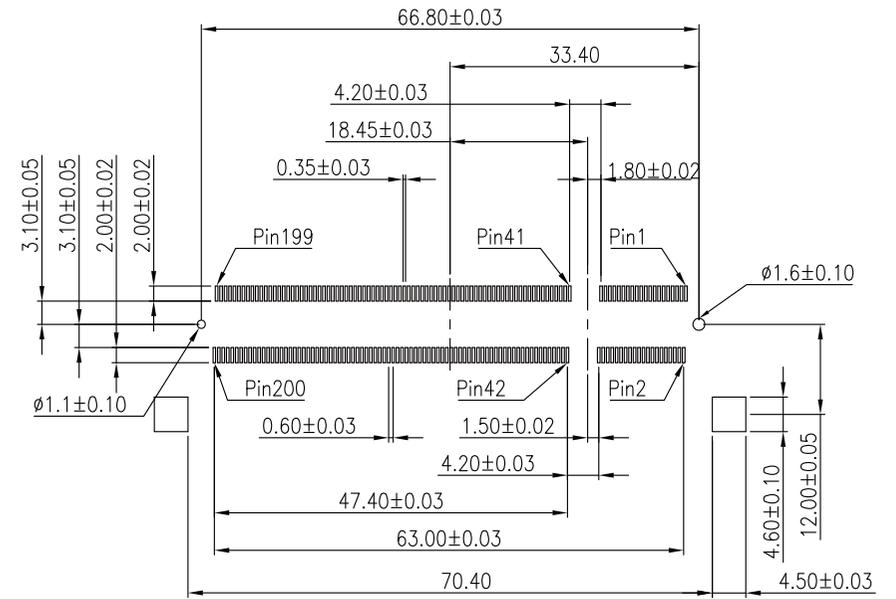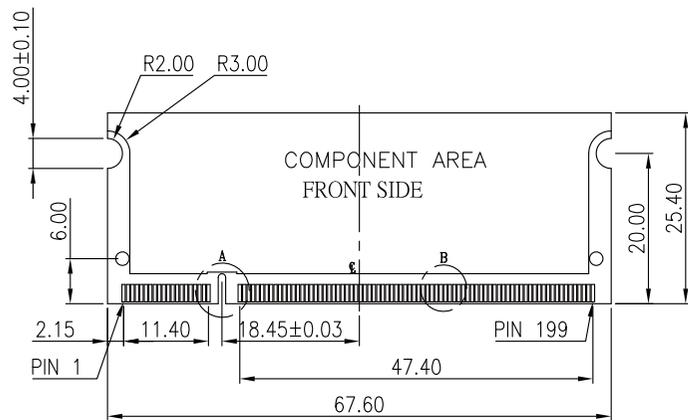

RECOMMENDED MODULE CONFIGURATION.

RoHS Compliant

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION





ORDER INFORMATION

SDM6-W92Vxx-40A6-LF

SERIES | LEADFREE  
40+160 WAY  
V18:1.8V  
V25:2.5V  
HIGH:9.2mm  
90°SMT

DESCRIPTION: DDR S.O.DIMM SOCKET 0.6MM PITCH, 200 PIN, 9.2 MM HEIGHT, STANDARD B-TYPE (RoHS)

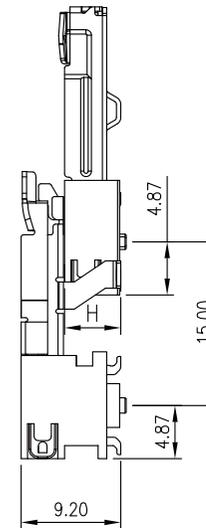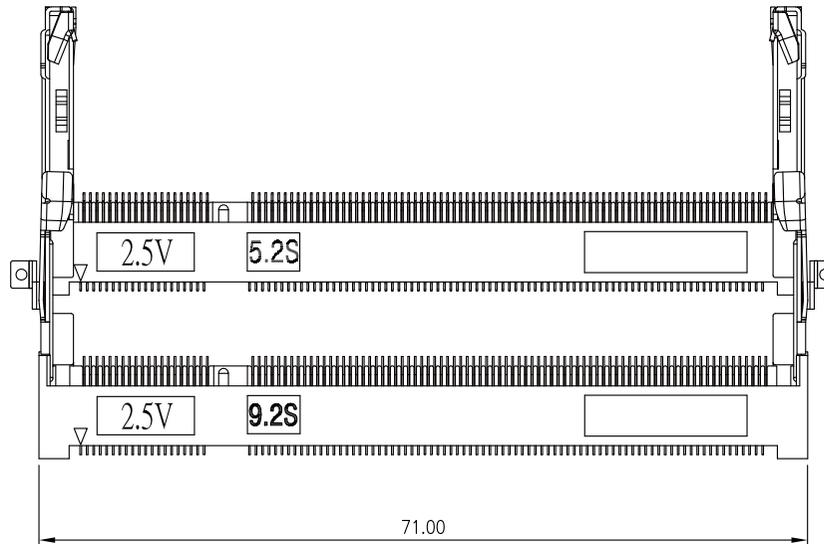

H=4.0MM (USING 4.0MM HEIGHT CONNECTOR)  
H=5.2MM (USING 5.2MM HEIGHT CONNECTOR)

COMBINATION DIMENSION FOR 4.0H OR 5.2H CONNECTOR

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±






**ORDER INFORMATION**

**SDM6-W92Vxx-40A6-LF**

SERIES		LEADFREE
		40+160 WAY
		V18:1.8V
		V25:2.5V
HIGH:9.2mm		
90°SMT		

DESCRIPTION: DDR S.O.DIMM SOCKET 0.6MM PITCH, 200 PIN, 9.2 MM HEIGHT, STANDARD B-TYPE (RoHS)

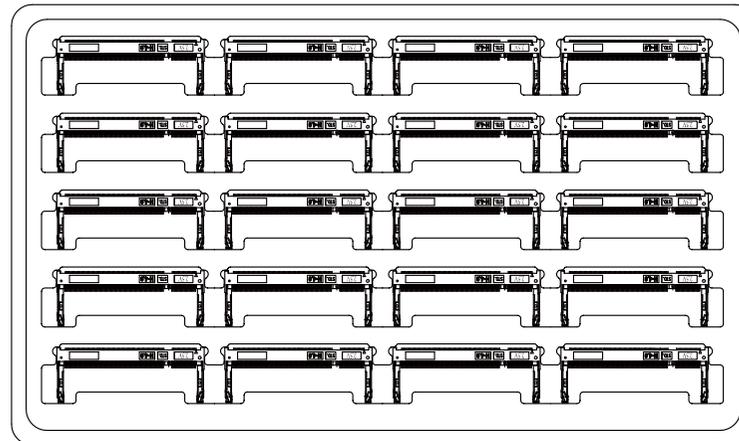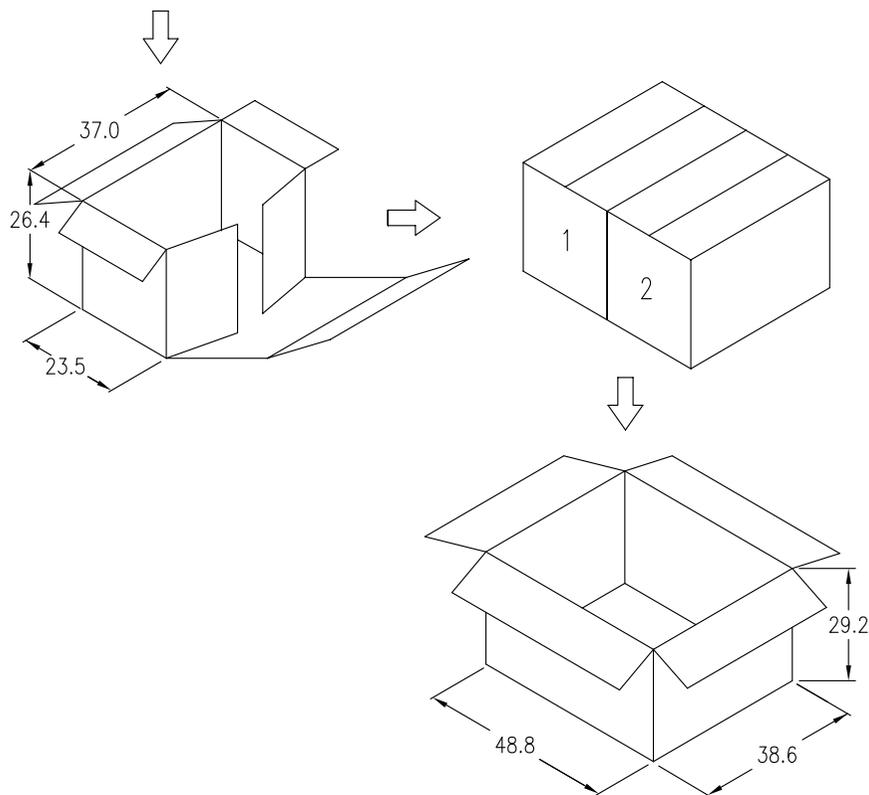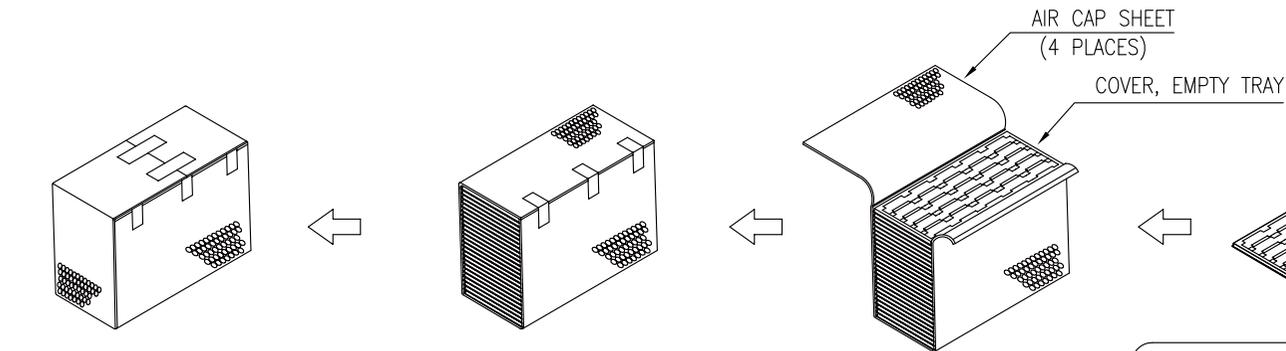

DESCRIPTION	S.O DIMM 200POS SMT 4.0 MM	S.O DIMM 200POS SMT 5.2 MM	S.O DIMM 200POS SMT 8.0 MM	S.O DIMM 200POS SMT 9.2 MM
PCS/TRAY	20	20	20	20
TRAY/INNER BOX	37+1 個空盤作為上蓋	30+1 個空盤作為上蓋	20+1 個空盤作為上蓋	20+1 個空盤作為上蓋
TOTAL (PCS)	740x2=1480	600x2=1200	400x2=800	400x2=800
CTN SIZE	48.8x38.6x29.2 CM	48.8x38.6x29.2 CM	48.8x38.6x29.2 CM	48.8x38.6x29.2 CM
TRAY MATERIAL	PS	PS	PS	PS
NW	5624G	5400G	5120G	5520G
GW	10225G	9303G	8369G	8769G

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

**SDM6-W92Vxx-40A6-LF**

SERIES | LEADFREE  
| 40+160 WAY  
| V18:1.8V  
| V25:2.5V  
| HIGH:9.2mm  
| 90°SMT

DESCRIPTION: DDR 200 POS SMT 4.0MM,5.2MM,8.0MM,9.2MM PACKAGING