

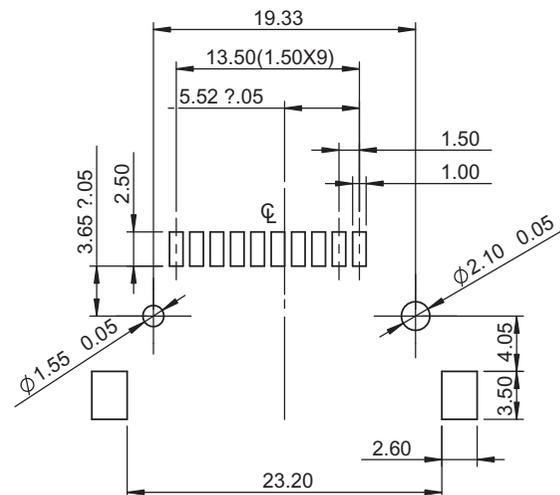


NOTES :
 1. MATERIAL :
 INSULATOR : LCP UL 94V-0
 CONTACT : COPPER ALLOY
 2. APPLICATION:
 MS & MS Duo & MS PRO & MS PRO Duo &
 MagicGate MS Duo & MS I/O Expansion & MS-
 ROM & MS Duo-ROM & MagicGate MS





RECOMMEND PCB LAYOUT

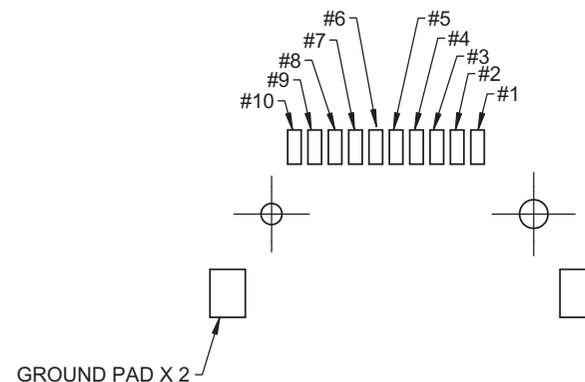

PIN DEFINITION

MS#1	VSS
MS#2	BS
MS#3	DATA1
MS#4	SDIO/DATA0
MS#5	DATA2
MS#6	INS
MS#7	DATA3
MS#8	SCLK
MS#9	VCC
MS#10	VSS

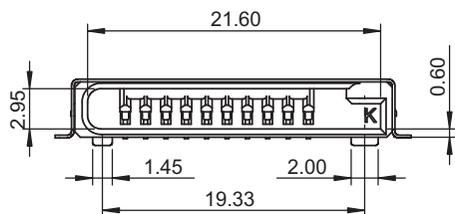

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

X, ±
 .X ± 0.50
 .XX ± 0.30
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

MSC-W19XAS-10-LF
 SERIES | | | | LEADFREE
 | | | | 10WAY
 | | | | SHORT BODY
 | | | | A TYPE
 90°SMT | | | | NON PUSH
 | | | | POST TO POST 19.33mm

DESCRIPTION: Memory Stick & Memory Stick Duo CONNECTOR REVERSE TYPE

煜倫股份有限公司

www.morethanall.com