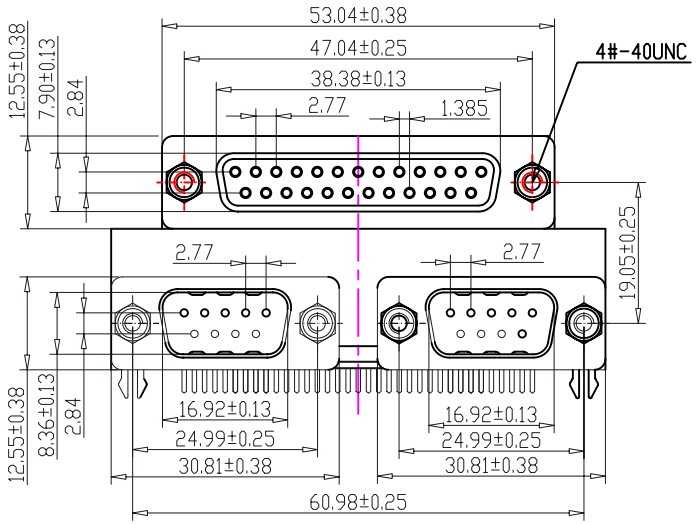

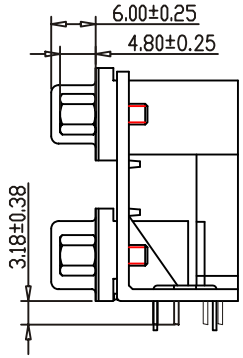

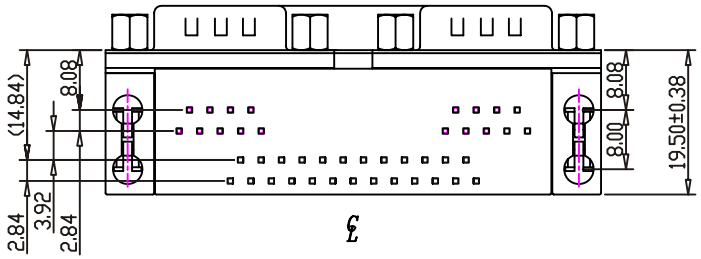

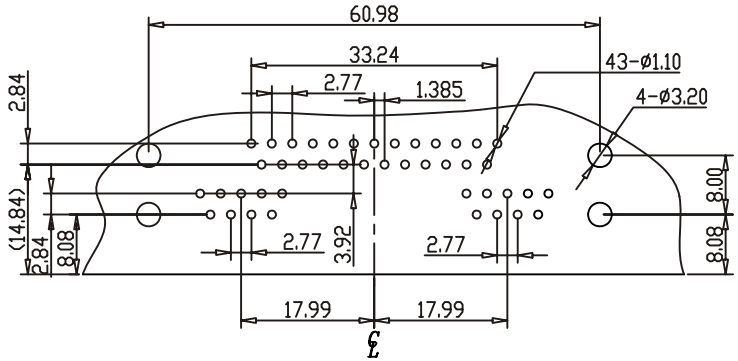

SPECIFICATIONS

ELECTRICAL CHARACERISTICS:

Contact Current Rating:3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:5000 Medohms Minimum.at DC 500V.
Contact Resistaance:25 Milliohms Maximum.
Operating Temperature:−55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
Contact Seperation Force:21 g.Maximum.

MATERIALS:

Contacts:Bass.
Insulator: PBT UL 94V−0 Rated.
Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
Shell:Nickel Plated.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

DRB1-AN19J-2599-LF

- SERIES
- NUT
- FEMALE TO MALE
- SPACING 19.05mm
- JACKSCRW
- 25 TO 09/09 WAY
- LEADFREE

DESCRIPTION: