

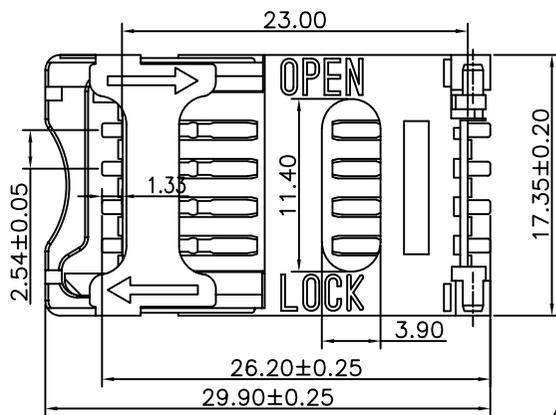


6p

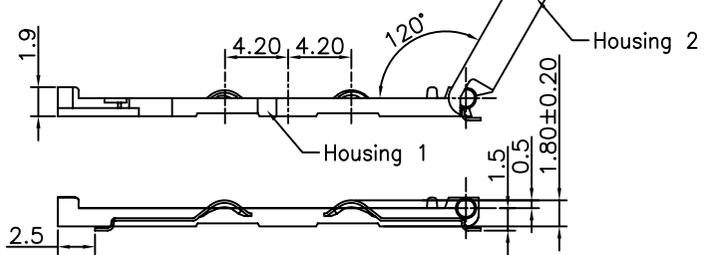

8p




Specifications

- Current Rating: 1Amp
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 250VAC
- Contact Resistance: 100mΩ Max
- Operating Temperature: -40°C to +85°C
- Max Process Temp: 200°C for 20~30 sec.
(230°C for 10~15seconds)

Materials

- Contact Material: Phosphor Bronze
- Insulation Material: Polyester, UL 94V-0
- Nylon6T Or Equivalent material(Housing 1)
- Nylon 46 Or Equivalent material(Housing 2)

Recommended P.C.Board Layout
(Tolerance: ±0.05)

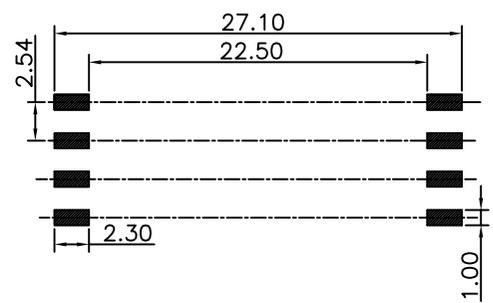

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

- X ± 0.30
- .X ± 0.25
- .XX ± 0.15
- .XXX ± 0.10
- ANG ±

PJECTION



ORDER INFORMATION

SCV-W2425X-xx-LF
 SERIES | | | LEADFREE
 | | | 06.08 WAY
 90°SMT | | | NON POST
 | | | HIGH 2.54mm
 | | | PAD TO PAD 24.80mm

DESCRIPTION: