
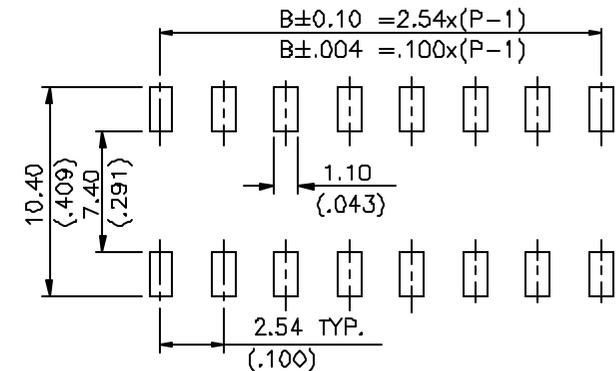


NOTE:




1. ALL DIMENSIONS ARE MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES : DECIMAL DIMENSIONS ± 0.20 [.008]
3. MATERIAL: HIGH-TEMP THERMOPLASTIC UL94V-0

12	32.77 (1.290)	27.94 (1.100)
*10	27.69 (1.090)	22.86 (.900)
9	25.15 (.990)	20.32 (.800)
* 8	22.61 (.890)	17.78 (.700)
7	20.07 (.790)	15.24 (.600)
* 6	17.53 (.690)	12.70 (.500)
5	14.99 (.590)	10.16 (.400)
* 4	12.45 (.490)	7.62 (.300)
3	9.91 (.390)	5.08 (.200)
* 2	7.37 (.290)	2.54 (.100)
POS NO.	A DIM	B DIM.

* AVAILABLE.

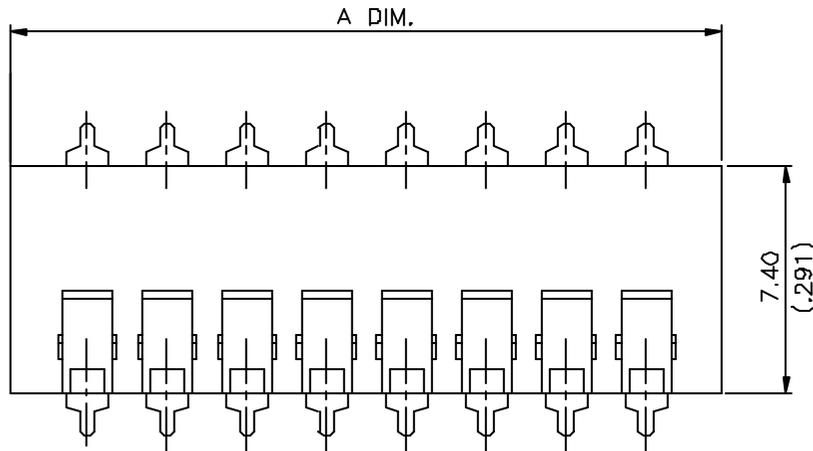

RECOMMEND PCB LAYOUT

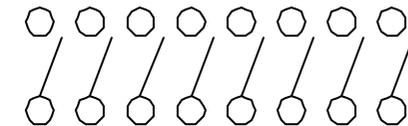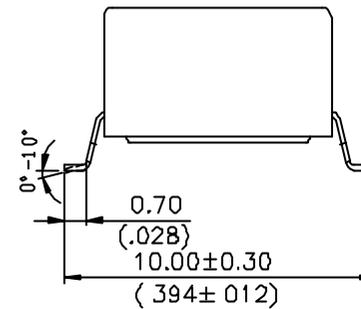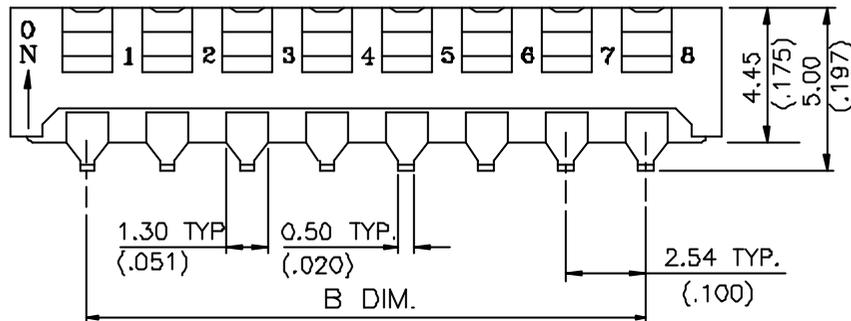

SCHEMATIC(TYP.)
(2 THROUGH 12 POS. AVAIL)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm



ORDER INFORMATION

SW-PV-xx-LF
SERIES | LEADFREE
| 02-12 WAY
| 180°SMT
| PINANO

DESCRIPTION: IC PIANO TYPE DIP SWITCH(SMT STYLE)

www.morethanall.com