

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:5 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:5000 Medohms Minimum
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:



Contact Insertion Force:341 g.Maximum.
 Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
 Shell:Nickel Plated.

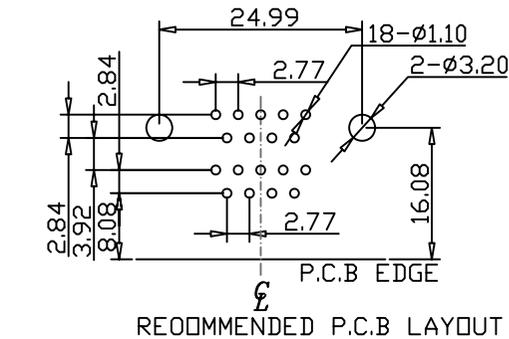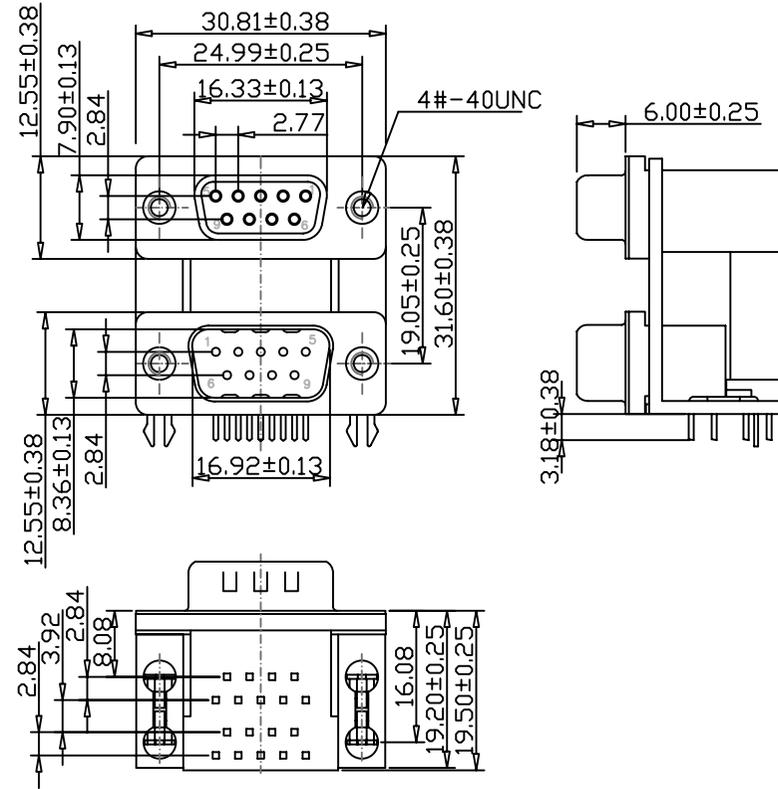

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X.±
 .X±
 .XX±
 .XXX±
 ANG±

P PROJECTION



ORDER INFORMATION

DRB1-AN19-0909-LF

SERIES

LEADFREE

09 TO 09 WAY

SPACING 19.05mm

NUT

FEMALE TO MALE

DESCRIPTION: D-SUB CONNECTOR 9 FEMALE/9 MALE DUAL PORT