


StandOFF	A	B
0	0.1mm	2.9mm
1	1.3mm	4.1mm
2	2.1mm	4.9mm

**SPECIFICATION**  
**MATERIAL**  
 Insulator: High Temp. Thermoplastic UL94V-0(9T)(GW250B)  
 Contacts: PhosPhor Bronze  
 Shell: Bronze ( Underplate Nickel )  
**CONTACT PLATING**  
 Underplate: 50u" Nickel  
 Contact area: 1u"~30u" Selective gold  
 Solder tails area: 100u" Tin/Lead(see contact area plating A,C,D)  
 Solder tails area: 100u" Tin/Lead Free(see contact area plating 4,6,7)  
**ELECTRICAL**  
 Operation voltage: 100 VAC max.  
 Current rating: 0.5 Amps max.  
 Contact resistance: 20 mohms max.  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC / minute  
 Operating temperature: -5°C TO +65°C

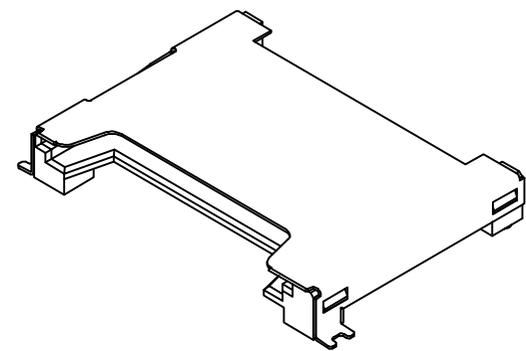

**RoHS Compliant**

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ± 1°



**ORDER INFORMATION**



SMC-W26X-20-LF  
 SERIES | | | LEADFREE  
 | | | 20 WAY  
 | | | NON PUSH  
 | | | POST TO POST 26.0mm  
 | | | 90°SMT

煜倫股份有限公司

www.morethanall.com

PJECTION

DESCRIPTION: XDC CONNECTOR SMT MOUNT

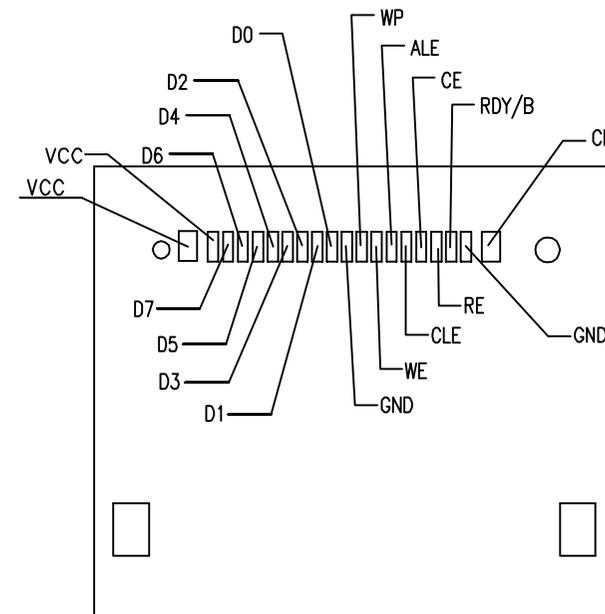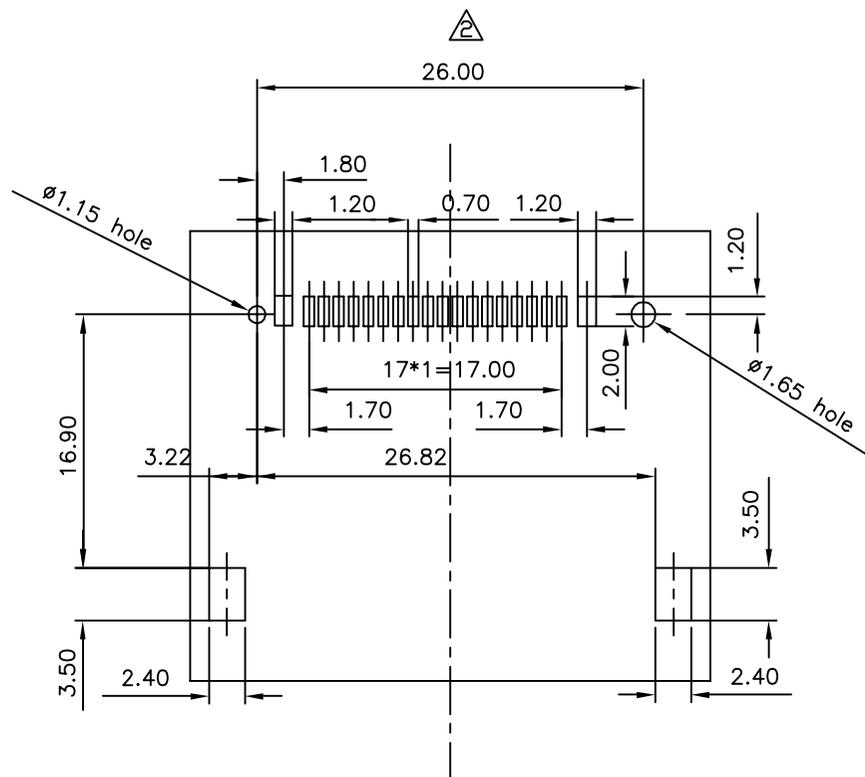

RECOMMENDED P.C.B LAYOUT  
TOLERANCE 0.05

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


.XXX ± 0.10

ANG ± 1°

DATE

SIZE A4

PJECTION



ORDER INFORMATION

SMC-W26X-20-LF  
SERIES | | | LEADFREE  
| | | 20 WAY  
| | | NON PUSH  
| | | POST TO POST 26.0mm  
| | | 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: XDC CONNECTOR SMT MOUNT