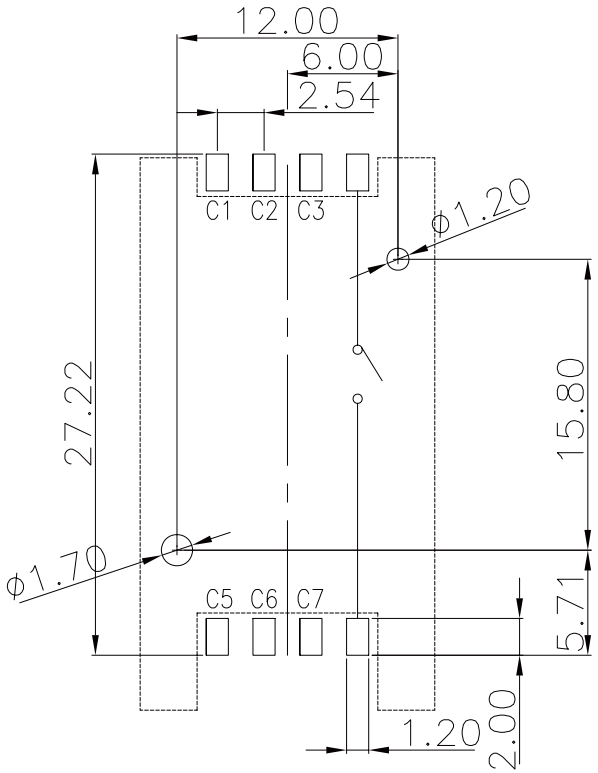

RECOMMANDED PCB LAYOUT

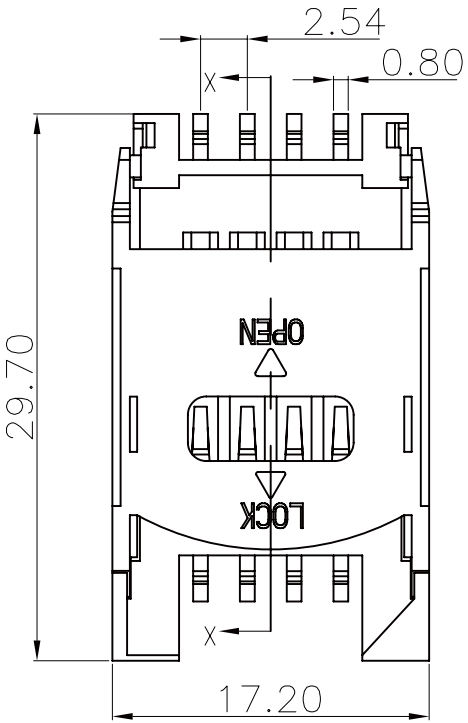

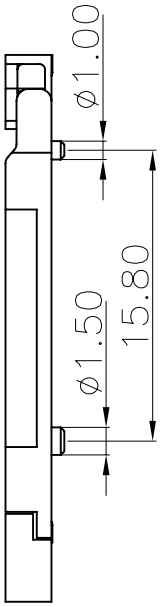

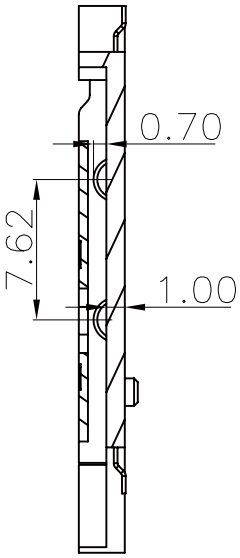

SECTION:X-X

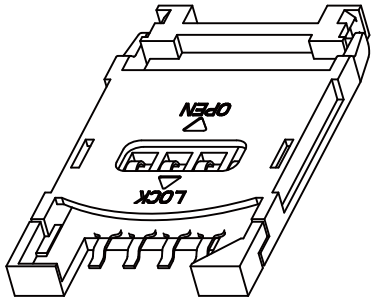

PART NAME	Q'TY	Meterial
HOUSING	1	LCP+30%GF
COVER	1	LCP+30%GF
CONTACT	8	C5210R-EH,GOLD 5u'

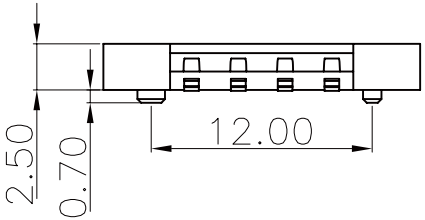

NOTE:
1.GENERAL CHARACTERISTICS
DURABILITY:5000 CYCLES.
OPERATIO TEMPERATURE:-25°C TO +85°C.
2.ELECTRICAL CHARACTERISTICS
CONTACT RESISTANCE:30M OHMS MAX.
INSULATION RESISTACE:>1000M OHMS MIN /500V DC.
RATED CURRENT:0.5A MAX.
WITHSTANDING DIELECTRIC VOLTAGE:500V AC R.M.S FOR 1MINUTE.
3.SOLDERABILITY
MAX PROCESSING TEMP:260°C FOR 10 SEC.

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

SCV-W2525PB-06-LF

- SERIES
- 90°SMT
- PAD TO PAD 25.54mm
- BODY HIGH 2.5mm
- WITH LOCATING PEG
- OPEN SWITCH
- 06WAY
- LEADFREE

DESCRIPTION: SIM Card Socket Hinge Type with Switch Function