
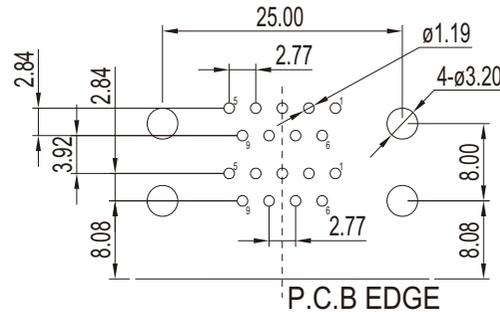


MATERIAL :

INSULATOR : THERMOPLASTIC, UL 94V-0.
 STANDARD : PBT.
 CONTACT : COPPER ALLOY.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL : SPCC.
 BOARDLOCK : BRASS, TIN PLATED
 BRACKET : ZINC ALLOY, NICKEL PLATED.

SPECIFICATION :

CURRENT RATING : 5 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE
 CONTACT RESISTANCE
 OPERATING TEMPERATURE : -55°C ~ +105°C

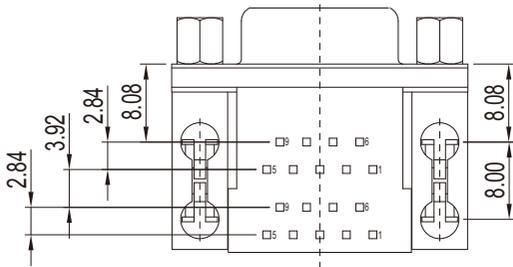

PORT SPACING	A±0.15	B±0.15
1	15.88	28.43
2	19.05	31.60

RECOMMENDED P.C.B LAYOUT

RoHS Compliant


TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

SIZE A4 PPROJECTION



ORDER INFORMATION

DRB1-FNxxJ-0909-LF
 SERIES | | | LEADFREE
 | | | 09 TO 09WAY
 FEMALE TO FEMALE JACKSCRW
 NUT 15: SPACING 15.88mm
 19: SPACING 19.05mm

DESCRIPTION:

www.morethanall.com