


Recommended P.C. Board
Hole Layout

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Standard: LCP
 Finish: Standard:Gold Flash all over

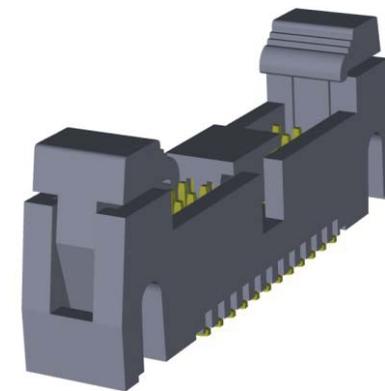

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
6	2.54	18.31	8.46	34	20.32	36.09	26.24
10	5.08	20.85	11.00	40	24.13	39.90	30.05
12	6.35	22.12	12.27	44	26.67	42.44	32.59
14	7.62	23.39	13.54	50	30.48	46.25	36.40
16	8.89	24.66	14.81	60	36.83	52.60	42.75
20	11.43	27.20	17.35	64	39.37	55.14	45.29
26	15.24	31.01	21.16	66	40.64	56.41	46.56
30	17.78	33.55	23.70	68	41.91	57.68	47.83

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PJECTION



ORDER INFORMATION

HAL-VCR-xxx-LF
 SERIES | LEADFREE
 REEL
 CAP
 180° SMT

煜倫股份有限公司

www.morethanall.com


DESCRIPTION:

Notes:

1. Packing Conforms EIA-481-B Standards.
2. 10 sprocket hole pitch cumulative
3. Carrier camber is within 1mm in250mm.
4. Material:BLACK Polystyrene.
5. Packing length per 13"Reel:5.76Meters.
6. Component load per 13"Reel:340+20PCS.

W	$+0.30$ -0.30	T	0.50 ± 0.05	P0	4.00 ± 0.10	A0	7.56 ± 0.15	A1	
S		F	± 0.15	P2	2.00 ± 0.15	B0	± 0.10	B1	
E	1.75 ± 0.10	P	16.00 ± 0.10	D0	$\phi 1.50^{+0.10}$	K0	12.10 ± 0.15	K1	



Tape Width	B±0.3mm	W+1mm
12mm	ø100mm	12.4mm
16mm		16.4mm
24mm		24.4mm
32mm		32.4mm
44mm		44.4mm
56mm		56.4mm
72mm		72.4mm

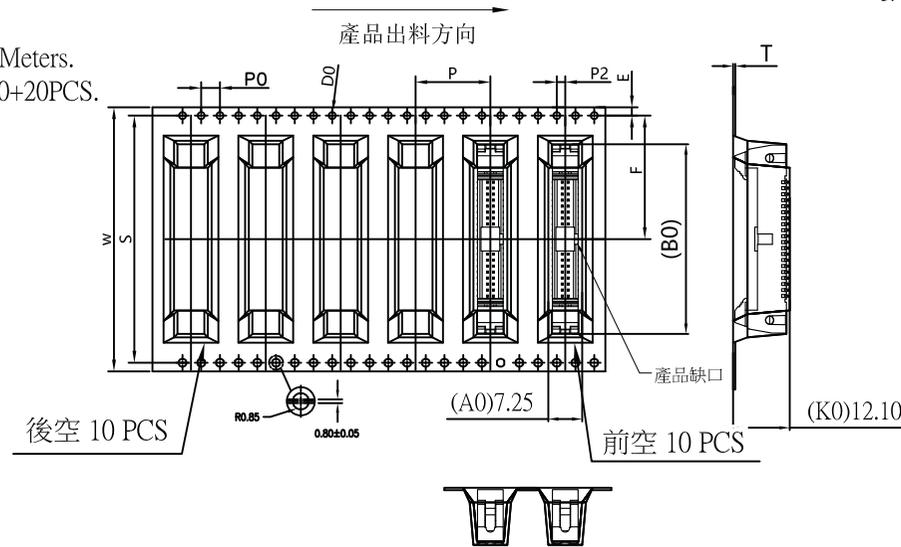

Packing instructions :

1. As shown in the figure, put the finished products into the reels, with 340pcs / reel;Before and after the empty 10 PCS
2. Put the finished product reel into the box
3. The four corners of the carton shall be sealed with adhesive tape, Attach shipping label ◦

CIRCUITS	W	B0	F	BOX
06 pin		18.61		
10 pin		21.15		
12 pin		22.42		
14 pin		23.69		
16 pin		24.96		
20 pin		27.50		
26 pin	44	31.60	20.20	5 rolls /1700Pcs
30 pin		33.85		
34 pin	56	36.45	26.20	5 rolls /1700Pcs
40 pin	56	40.20	26.20	5 rolls /1700Pcs
44 pin		42.74		
50 pin		46.55		
60 pin		52.90		
64 pin		55.44		
66 pin		56.71		
68 pin	72	57.98	26.20	4 rolls /1360Pcs

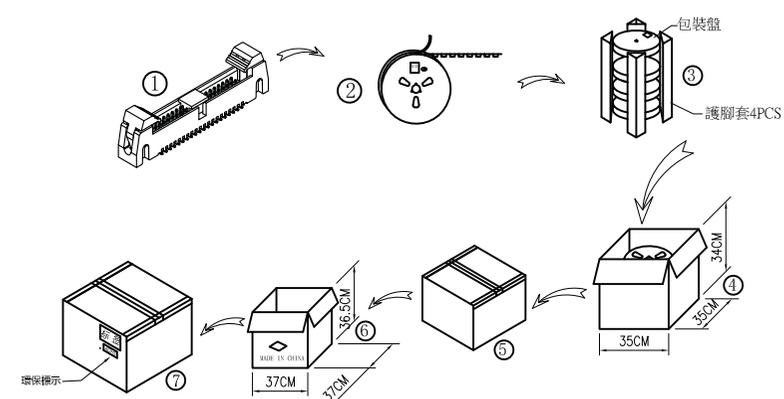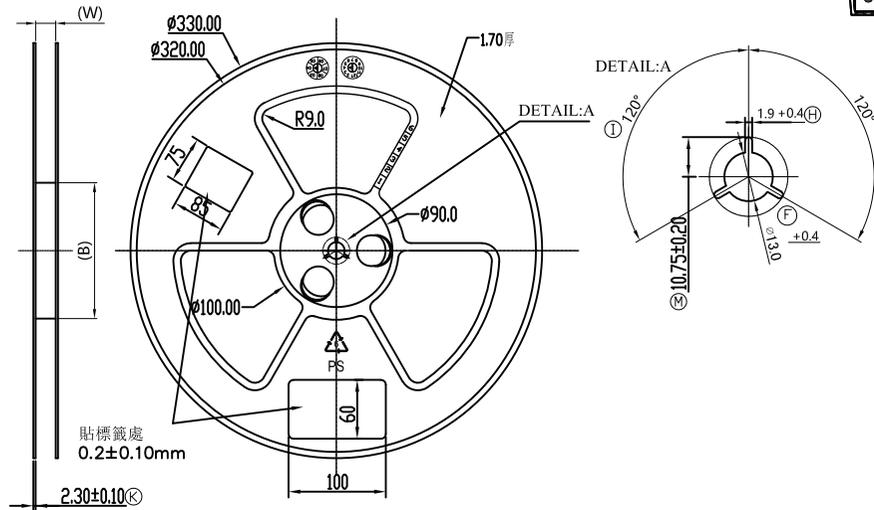

注：旋轉式REEL

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

HAL-VCR-xxx-LF
SERIES | LEADFREE
006-068 WAY
REEL
CAP
180° SMT

DESCRIPTION: