

Specifications:

Current rating:3.0A AC,DC

Voltage rating:100V AC,DC

Contact resistance:10mohm max.

Insulation resistance:5,000Mohm min.

Withstanding Voltage:1,000V AC/Minute



Temperature range:-40°C ~ +105°C

Materials:

Insulator:HighTemp.Plastic (UL94V-0)

Contact:Beryllium Copper

Plated: **Tin** Plated

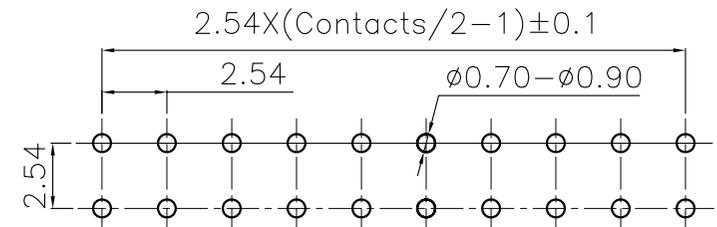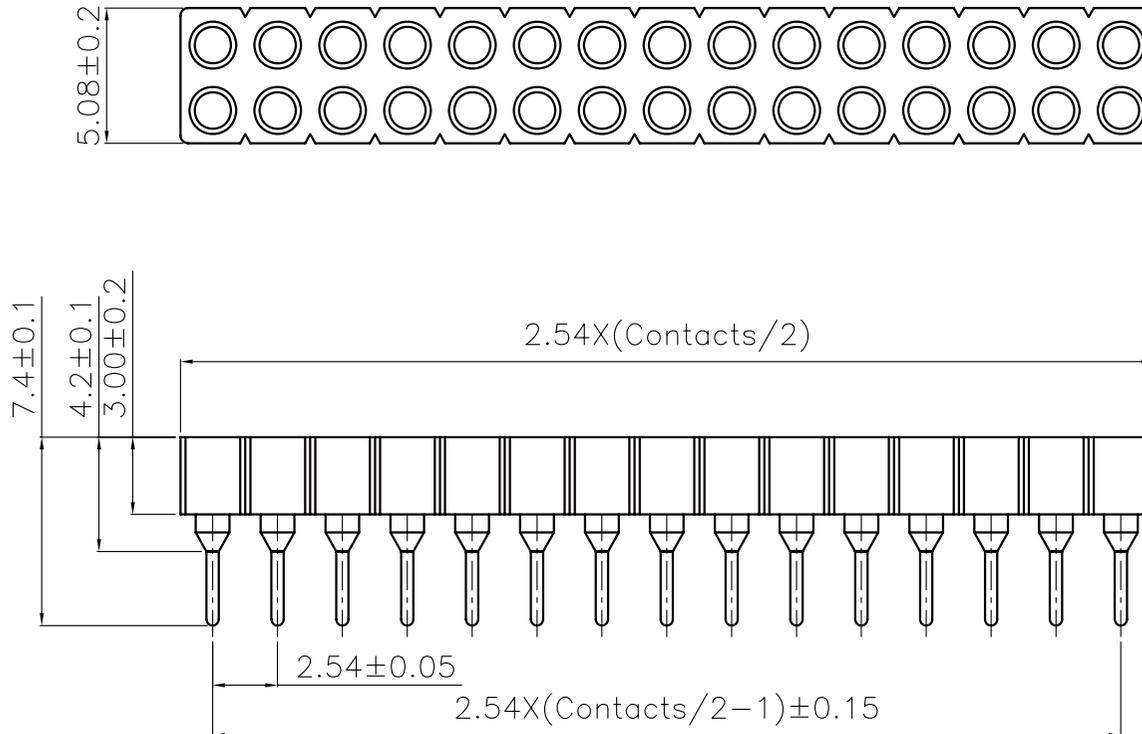

P.C.B LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

SS-D-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X40:80WAY
DIP 180°

DESCRIPTION: