

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 1000V/60sec. r.m.s.
 Insulation Resistance: 5000 Megohms Minimum. at DC 500.
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:


Contact Insertion Force: 341 g. Maximum.
 Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
 Shell: Nickel Plated.

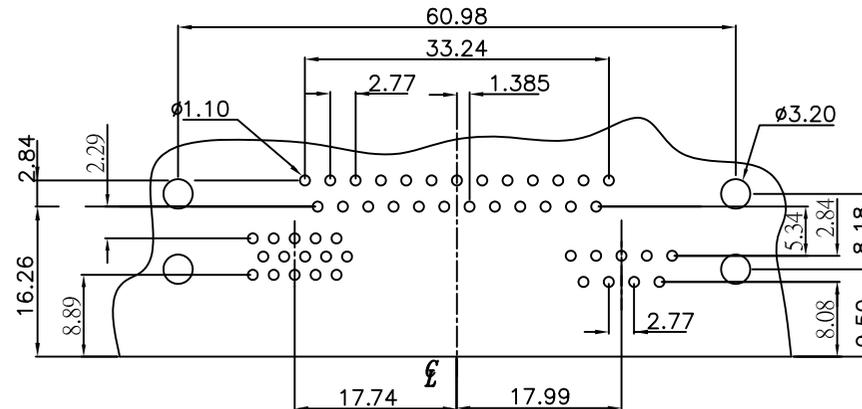

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

DRB1-FN8-2539-LF

SERIES LEADFREE
 25 TO 15/09 WAY
 8.89mm
 NUT
 FEMALE TO FEMALE/ MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: TRIPLE D-SUB 25 FEMALE LPT1 PORT/15 FEMALE H/Dx2 VGA PORT