
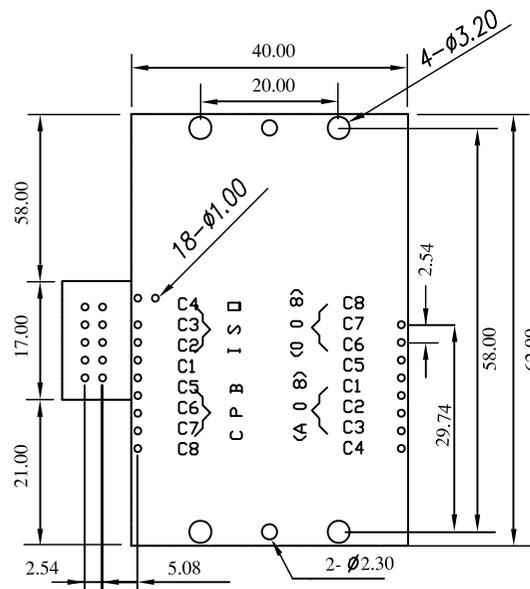
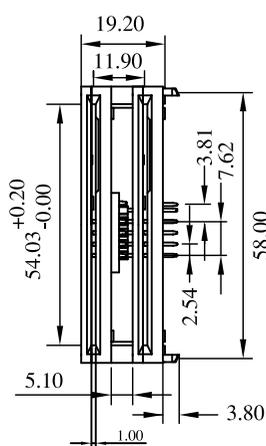


Series Smart Card Connector (V3 Double Type)

SPECIFICATION:

- Contact Material: Phosphor Bronze (SPOON)
- Insulator Material: P.B.T, UL 94V-0
- Terminal Plating: SnPb on nickel
- Switch Contact Plating: Gold(30micro Inch)On Nickel
- Current rating: 1A DC MAX
- Insulation resistance: 1000 Megaohms MIN
- Contact resistance: 100 milliohms MAX
- Withstand voltage: AC 1000V RMS (1MIN)
- Rated voltage: 50V DC MAX
- Temperature Range: -40°C~ +60°C
- Card Insertion Force: 511g MAX
- Card Withdrawal Force: 102g MIN
- Insertion Cycles: 100000 cycles MIN

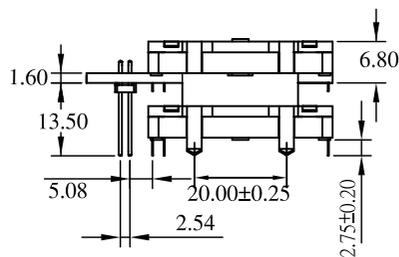

Through Hole Mounting

Note:

- Card Insertion Specification :
A.Card Insertion Depth 35.3mm
B.Card Thickness Depth 0.7 ~ 0.8mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG, ±

SIZE A4

PPOJECTION



ORDER INFORMATION

SCF-Rx-xx-LF
SERIES | LEADFREE
08.16 WAY
A:CLOSED/SWITCH
B:OPEN/SWITCH
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Series Smart Card Connector (V3 Double Type)