


SECTION A-A

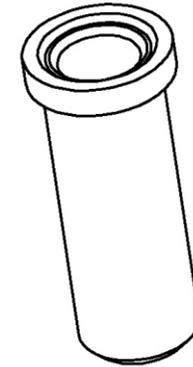

Material

- Pin (outer sleeve) : Brass,machined,CuZn38pB2
- Clip (contact 4 finger) : BeCu.heat treated
- Plating(Outer sleeve) : Tin plated:2u"/80u"nickel, 5u"/200u"Tin
- Gold plated;2ugm/80u"nickel,Full gold flash
Plating(contact) : 2u"/80u"nickel,gold or Tin plating
- FOR DIA. $\phi 0.80$ TO $\phi 1.20$ mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm



ORDER INFORMATION

SS-DXT-1.0-LF
SERIES | LEADFREE
DIA 1.0mm
WITHOUT TAIL
DIP 180°

DESCRIPTION: