

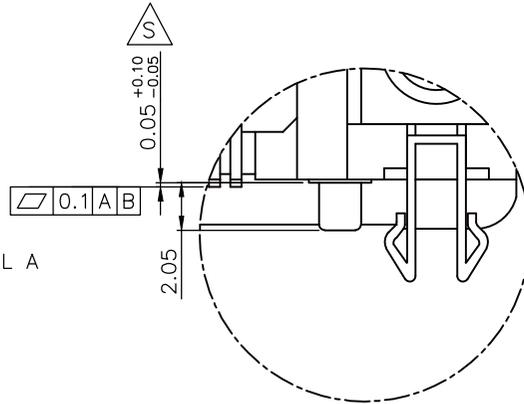


- NOTES:
- MATERIAL:
 - HOUSING: HIGH TEMP THERMOPLASTIC, UL94V-0
 - TERMINAL: PHOSPHOR BRONZE
 - METAL SHELL: SPCC
 - BOARD LOCK & NUT: BRASS
 - PLATING:
 - TERMINAL:
 - CONTACT AREA: SELECTIVE GOLD(Au) PLATING
 - SOLDER TAIL: TIN(Sn), THICKNESS=100 MICROINCH MIN.(2.54 MICROMETER MIN.)
 - UNDER PLATE: NICKEL(Ni), THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
 - METAL SHELL:
 - NICKEL(Ni), THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)
 - UNDER PLATE: COPPER(Cu), THICKNESS=40 MICROINCH MIN.(1.016 MICROMETER MIN.)
 - BOARD LOCK:
 - TIN(Sn), THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)
 - UNDER PLATE: NICKEL(Ni), THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
 - NUT: NICKEL(Ni), THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)
 - RECOMMENDED PCB THICKNESS: 1.60±0.05mm

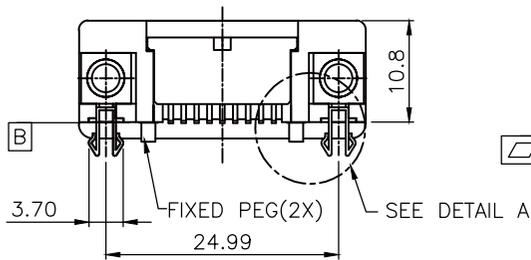

DETAIL A
SCALE 3:1

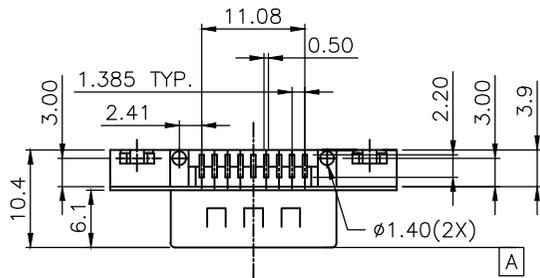

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1:1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 3°

SIZE A4

PJECTION



ORDER INFORMATION


DW-PN22R-09-LF

SERIES | REEL | CLIP | NUT | MALE | LEADFREE | 09 WAY

DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE SURFACE-MOUNT LOW PROFILE 9 POSITION, MALE

煜倫股份有限公司


www.morethanall.com

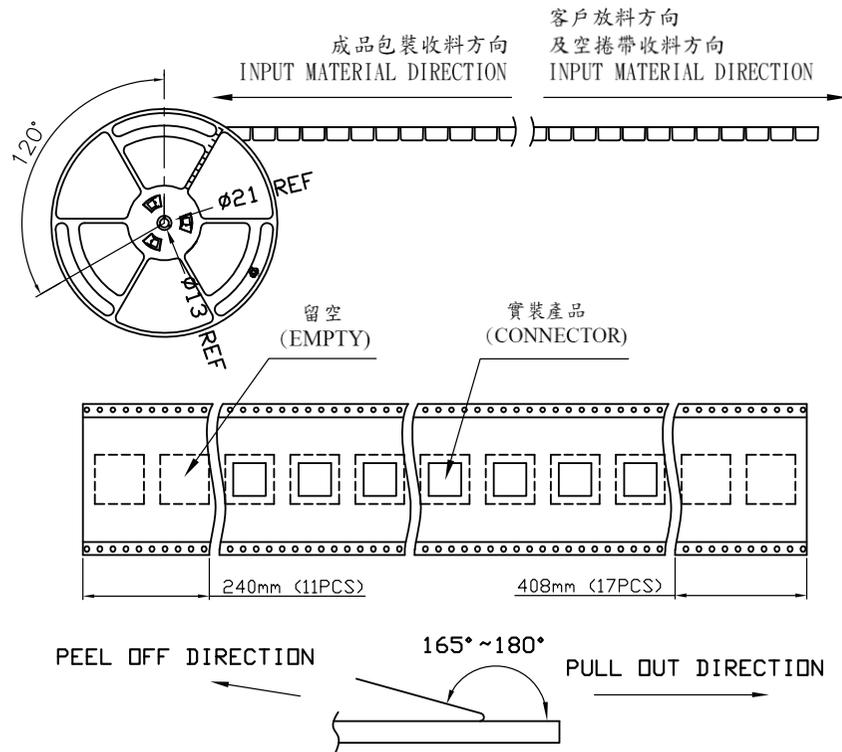

PEELING SPEED	300mm/MIN±10mm/MIN
FORCE	30g~130g

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481-C requirements.
5. Thickness : 0.40 ± 0.05 mm.
6. Packing length per 13" reel : 4.4 Meters. (蓝色旋转圆盘)
7. Component load per 13" reel : 150 pcs.

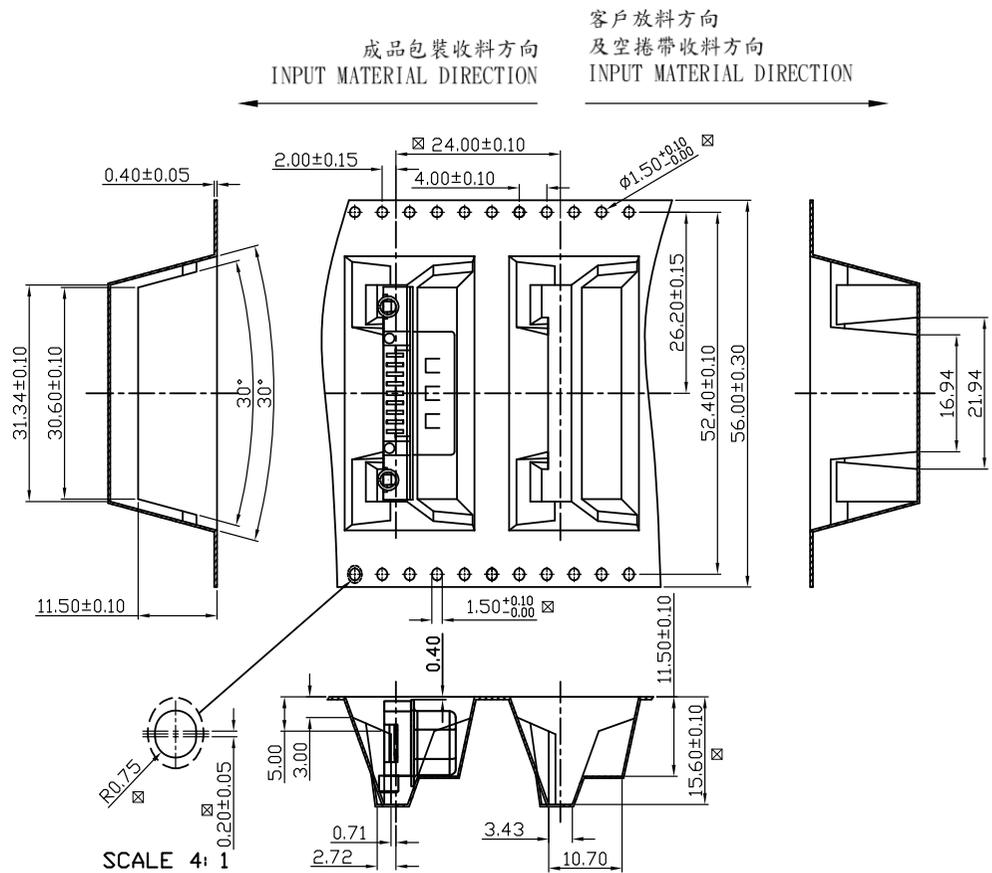

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°



ORDER INFORMATION


DW-PNZ2R-09-LF
SERIES | LEADFREE
09 WAY
REEL
CLIP
NUT
MALE

DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE SURFACE-MOUNT LOW PROFILE 9 POSITION, MALE


煜倫股份有限公司

www.morethanall.com

捲盤外圈增加3處透明膠帶固定 

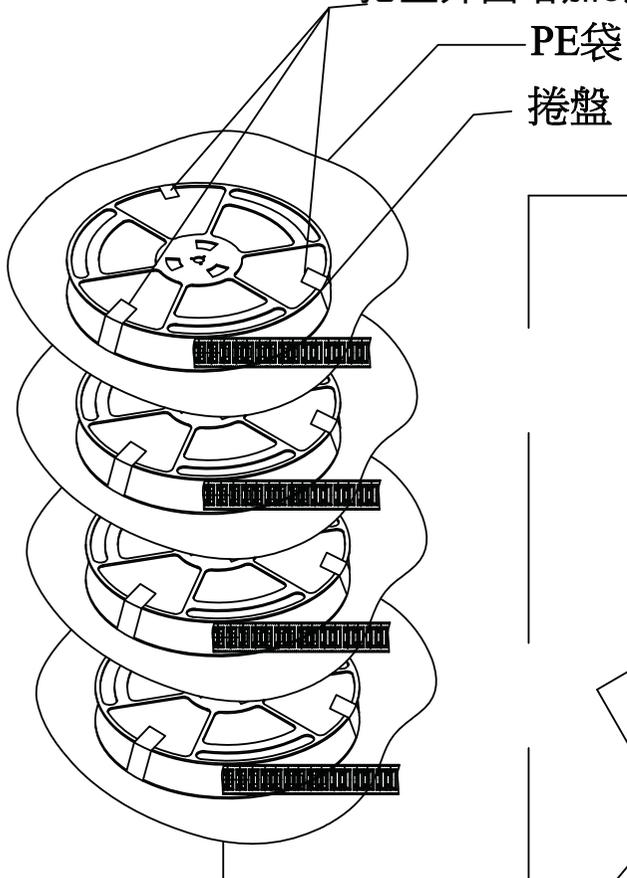

FOR PRODUCT PART NO	PARTS PER CARTON (S. P. Q)	PARTS PER PEEL	TOTAL PEELS PER CARTON
DW-PNZ2R-09	600	150	4

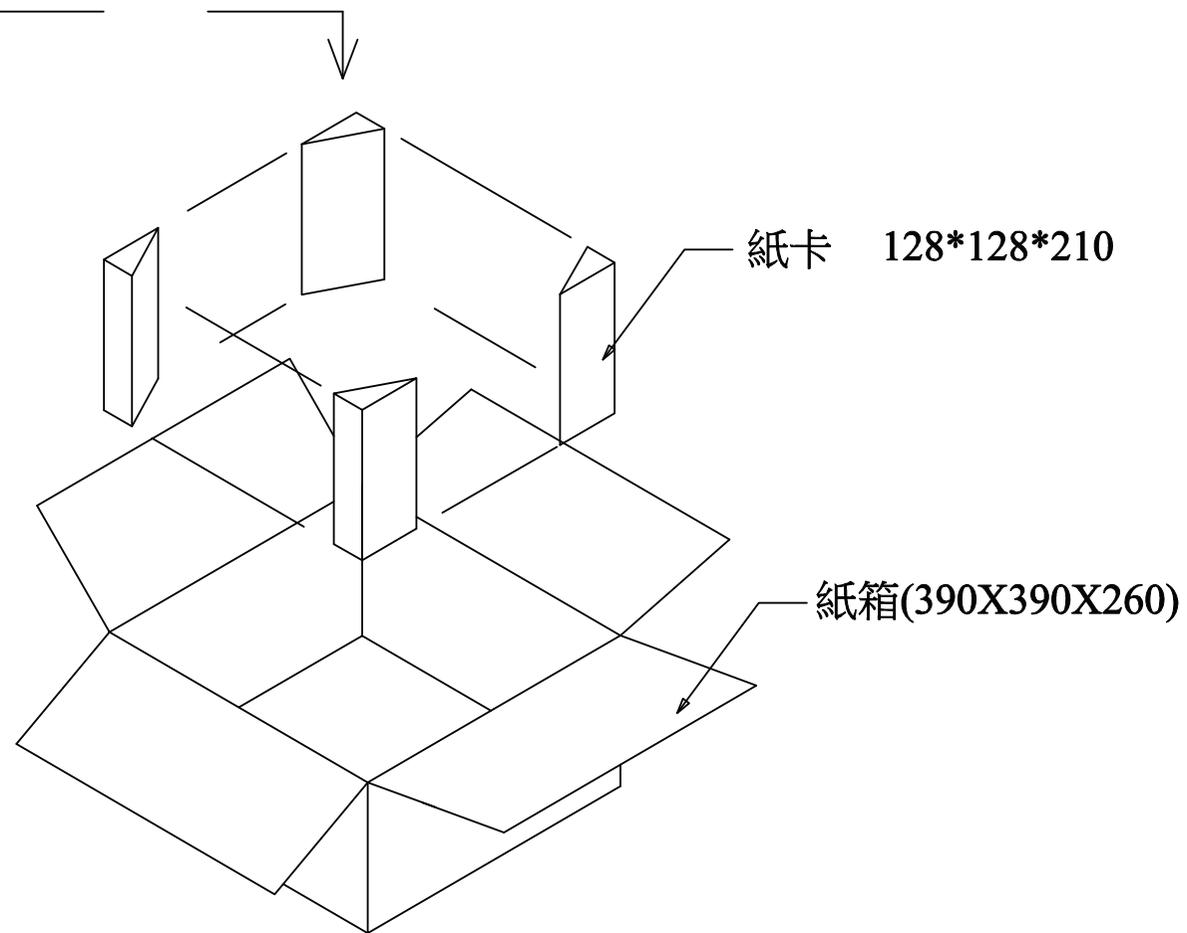

裝滿成品的卷盤放進PE袋內, 然後加入乾燥機, 抽真空後再放進外箱內.

RoHS Compliant

TOLERANCES ARE




煜倫股份有限公司
www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1:1
DATE
SIZE A4 PPROJECTION 

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°



ORDER INFORMATION

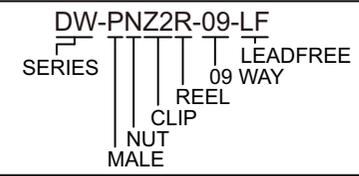

DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE SURFACE-MOUNT LOW PROFILE 9 POSITION, MALE