

HOOD:

2 PIECES, ZINC ALLOY
NICKEL PLATED ASSEMBLY

INSULATOR:

PBT & GLASS-FIBRE
REINFORCED UL 94V-0

PIN CONTACT:

PHOSPHOR BRONZE


METRIC HARDWARE:

THE MOUNTING HARDWARE USED
METRIC THREADS,
(ISO,M3.5),NICKEL PLATED

24 CONDUCTOR CABLE:

UL2464 26# (IEEE-488) BRAIDED TWIST
COMPUTER CABLE

PIN ASSIGNMENT

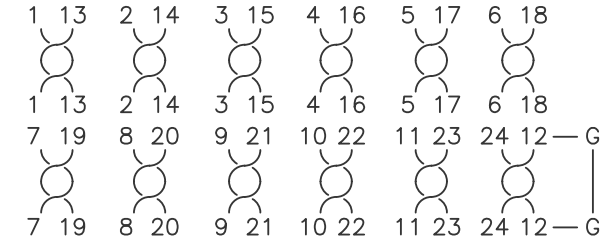

CABLE LENGTH(UNIT=M)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ±

.XXX ±

ANG ± 3°

DATE

SIZE A4

PJECTION



ORDER INFORMATION

CNX2-242426-BxxF-LF

SERIES

LEADFREE

CABLE LONG

DUAL MALE TO FEMALE

26 AWG

24 TO 24 WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: